



## MARK-S

| | |
|---|---|
| **Item code** | **86.OIN7.3331.03** |
| **Product type** | **Outdoor** |
| **Category** | **Recessed Inground Floor** |
| **Family** | **MARK** |
| **Subfamily** | **MARK-S** |
| **Pictograms** |  |



| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **Ø55X86mm** |


**Scheme**

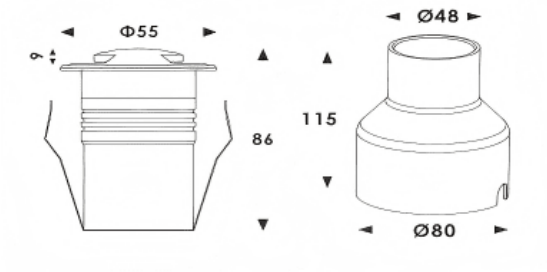




| **Product** | |
|---|---|
| **Real power (W)** | **2.6** |
| **Beam angle (º)** | **assymetric** |
| **Life time (h)** | **50000h L80B10** |
| **IP** | **67** |
| **Control gear** | **ON-OFF** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK10** |

## Photometry

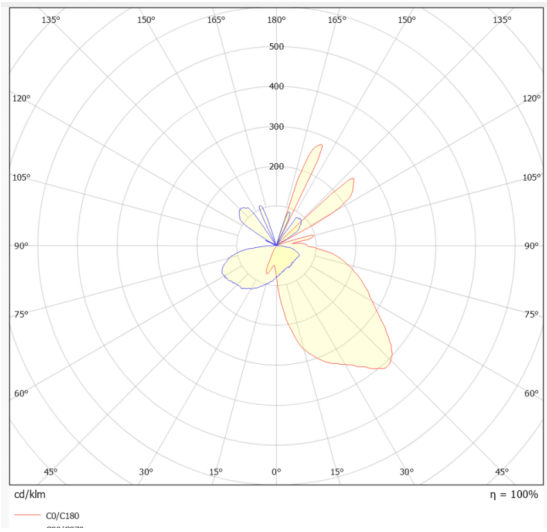
135° 150° 165° 180° 165° 150° 135°
500
400
300
200
120° 120°
105° 105°
90° 90°
75° 75°
60° 60°
45° 30° 15° 0° 15° 30° 45°
cd/klm
η = 100%
C0/C180

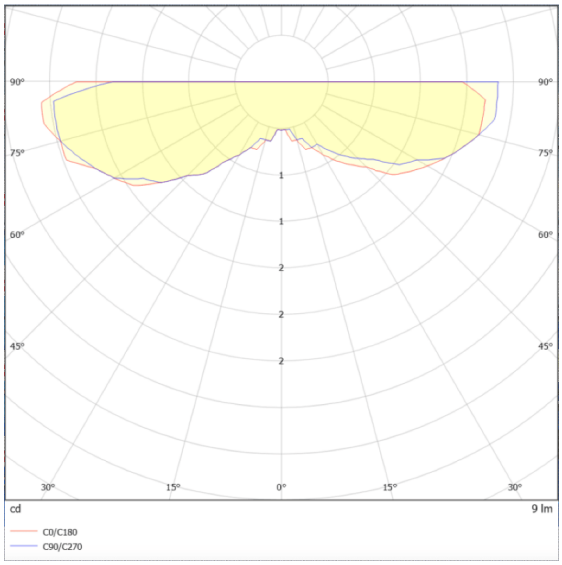
90° 90°
75° 75°
1
1
60° 60°
2
2
2
45° 45°
30° 15° 0° 15° 30°
cd
9 lm
C0/C180
C90/C270