











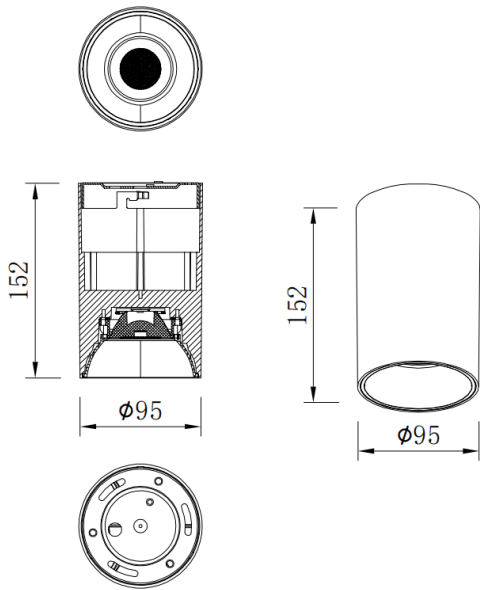
SDOWN

| | |
|--------------|---|
| Item code | 86.OC02.2313.03 |
| Product type | Outdoor |
| Category | Surface Ceiling Downlight |
| Family | SDOWN |
| Pictograms |         |

Dimensions

Product dimensions (mm) Ø95X152 mm

Scheme



| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 20 |
| Real luminous flux (Lm) | 1600 |
| Luminous efficiency (Lm/W) | 80 |
| Beam angle (°) | 20 |
| Life time (h) | 50000h L80B10 |
| IP | IP65 |
| Control gear | DALI |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM3 |
| CRI | 80 |

Photometry

**SURFACE CEILING DOWNLIGHT -
SDOWN**

Item code 86.OC02.2313.03

