




**Dimensions**








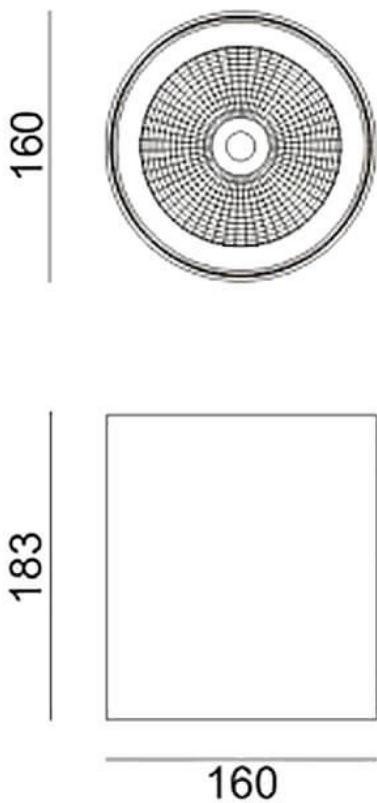



**Product dimensions (mm)**      **diam 160x183mm**

**Scheme**



SDOWN

Item code	86.OC02.3313.03
Product type	Outdoor
Category	Surface Ceiling Downlight
Family	SDOWN

Pictograms	    
	   
	 

Product	
Real power (W)	40
Real luminous flux (Lm)	3250
Luminous efficiency (Lm/W)	81.25
Beam angle (°)	15°
Life time (h)	50000h L80B10
IP	65
Chip Brand	Osram
Control gear	DALI
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	>80
IK	IK06