


**EMERGENCY DOWNLIGHT - E-
DOWNLIGHT**

Item code 86.E003.1571.02




Scheme

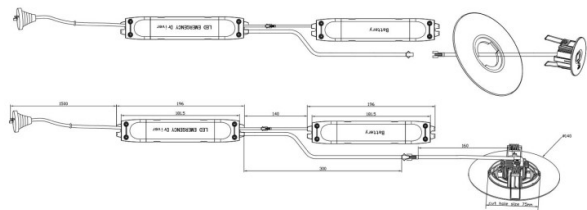

Photometry

EMERGENCY DOWNLIGHT - E-DOWNLIGHT


Item code 86.E003.1571.02

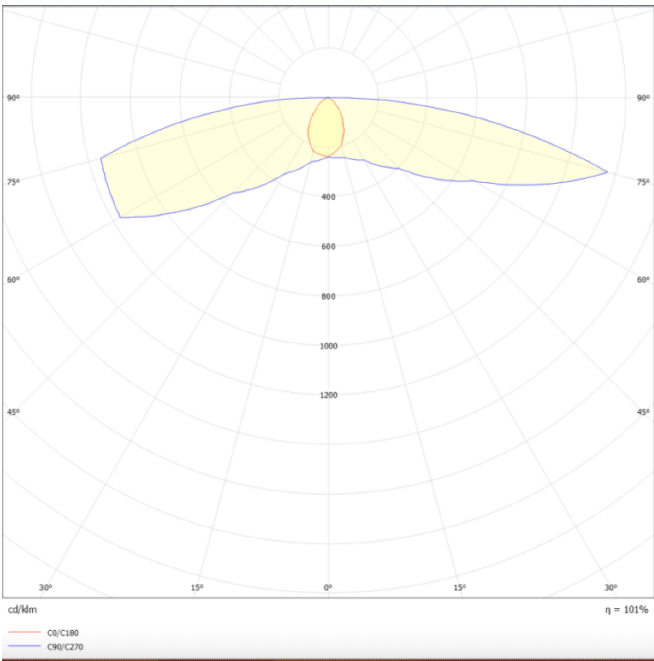



E-DOWNLIGHT


| | |
|--------------|---------------------|
| Item code | 86.E003.1571.02 |
| Product type | Emergency |
| Category | Emergency downlight |
| Family | E-DOWNLIGHT |


Pictograms


50
60 Hz

220
240 V

CE

Driver
INCL.

On
Off

IP
20

| | |
|-----------------------------|---------|
| Product | |
| Real power (W) | 3 |
| Real luminous flux (Lm) | 220 |
| Beam angle (°) | 165x69 |
| IP | 20 |
| Chip Brand | Smalite |
| Control gear | ON-OFF |
| Colour temperature (K) | 5000 |
| CRI | >70 |
| Emergency battery life time | 3 |