




Scheme



Photometry

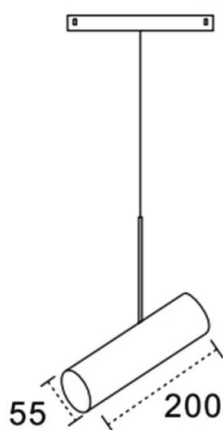

Suspended spotlight adjustable

Item code	86.TL01.R323.02
Product type	Indoor
Category	Tracklights
Family	Magnetic Track
Subfamily	Suspended spotlight adjustable
Pictograms	<div><div></div><div>220 240 V</div><div>CRI 90</div><div>CE</div><div>Driver INCL.</div></div> <div><div></div><div>IP 20</div><div>50000h L80B10</div></div>

Product	
Real power (W)	12
Real luminous flux (Lm)	1200lm
Luminous efficiency (Lm/W)	100
Beam angle (°)	24°
Chip Brand	EPISTAR
Control gear	DALI Brightness Dim 0.1~100%
Average life time (h)	50000hrs L80 B10
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	90