




Suspended spotlight adjustable

| | | | | | |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| Item code | 86.TL01.R333.02 | | | | |
| Product type | Indoor | | | | |
| Category | Tracklights | | | | |
| Family | Magnetic Track | | | | |
| Subfamily | Suspended spotlight adjustable | | | | |
| Pictograms | <div><div></div><div>220 240 V</div><div>CRI 90</div><div>CE</div><div>Driver INCL.</div></div> <div><div></div><div>IP 20</div><div>50000h L80B10</div></div> | | | | |

Scheme

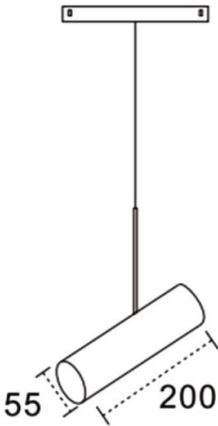

| | |
|----------------------------|---------------------------------|
| Product | |
| Real power (W) | 12 |
| Real luminous flux (Lm) | 1200lm |
| Luminous efficiency (Lm/W) | 100 |
| Beam angle (°) | 36° |
| Chip Brand | EPISTAR |
| Control gear | DALI Brightness Dim 0.1~100% |
| Average life time (h) | 50000hrs L80 B10 |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 90 |