




PERFORM-R Smart

| | |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item code | 86.DS22.630T.01 |
| Product type | Indoor |
| Category | Downlights |
| Family | PERFORM-R |
| Subfamily | PERFORM-R Smart |
| Pictograms | <div><div></div><div>220 240 V</div><div>CRI 80</div><div>CE</div><div>Driver INCL.</div></div> <div><div>On Off</div><div>DALI</div><div>IP 20</div><div>50000h L80B10</div></div> |

Dimensions

| | |
|-------------------------|--------|
| Product dimensions (mm) | 230*72 |
|-------------------------|--------|

Scheme

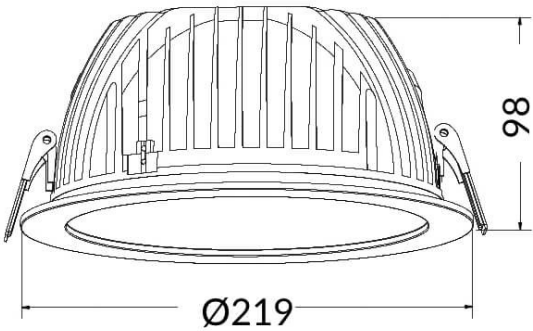

Product

| | |
|----------------------------|----------------|
| Real power (W) | 42 |
| Real luminous flux (Lm) | 4200 |
| Luminous efficiency (Lm/W) | 100 |
| Beam angle (°) | 80 |
| Life time (h) | 50000 h L80B10 |
| IP | 20 |
| Control gear | PHILIPS ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<5 |
| CRI | 80 |