





Scheme



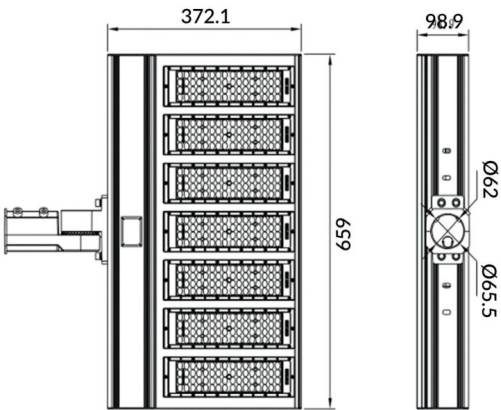

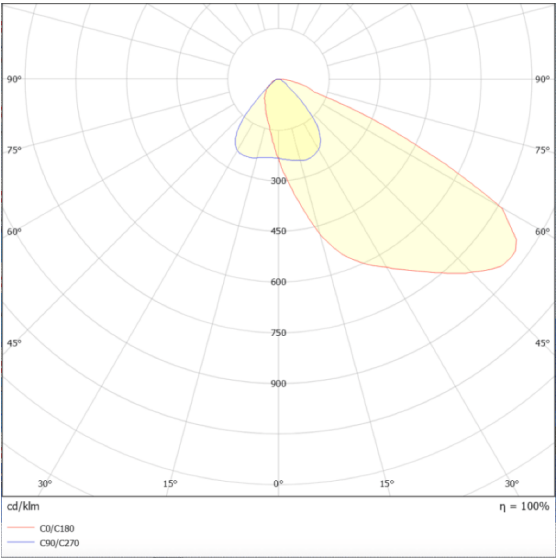




Photometry



Pole

| | |
|--------------|-----------------|
| Item code | 86.OF11.6451.02 |
| Product type | Outdoor |
| Category | Floodlights |
| Family | COURT |
| Subfamily | Pole |

Pictograms



| | |
|----------------------------|-----------------------|
| Product | |
| Real power (W) | 400 |
| Real luminous flux (Lm) | 56000 |
| Luminous efficiency (Lm/W) | 140 |
| Beam angle (°) | 50x90 |
| IP | IP65 |
| Control gear | ON-OFF |
| Average life time (h) | Up to 100,000hrs LM70 |
| Colour temperature (K) | 5000K |
| Colour consistency (SDCM) | <5 |
| CRI | 75 |
| IK | IK10 |