









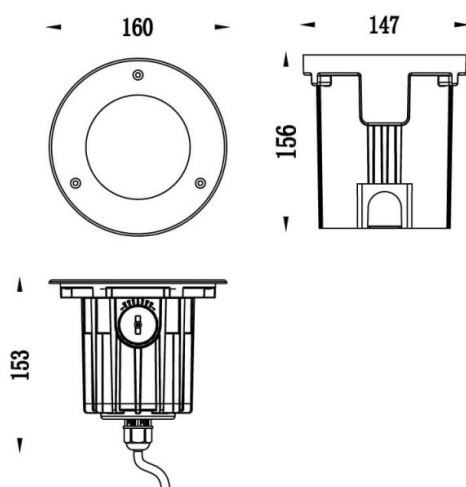

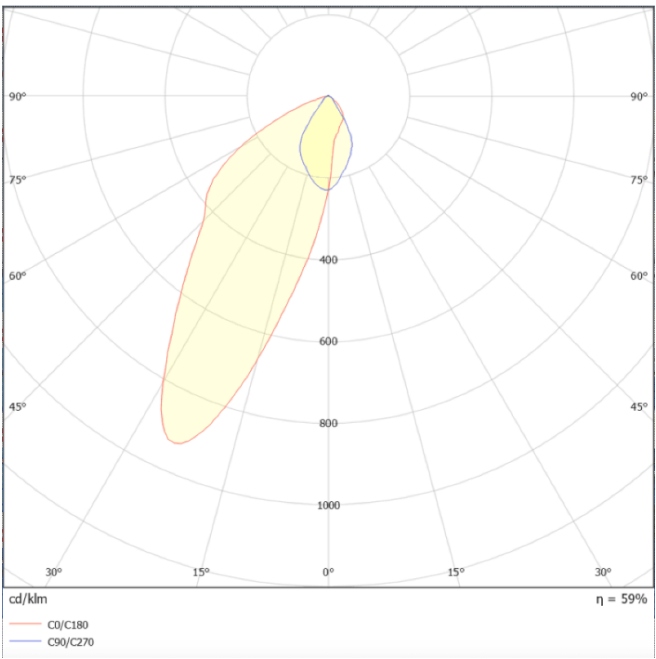




Scheme



Photometry



ING-ASSY

Item code	86.OIN6.3351.07
Product type	Outdoor
Category	Recessed Inground Floor
Family	ING-ASSY
Pictograms	<div><div>50 60 Hz</div><div>220 240 V</div><div>850°</div><div>IK 09</div></div> <div><div>CRI 80</div><div></div><div>Driver INCL.</div><div></div><div>SDCM 5</div></div> <div><div>50000h L80B10</div><div>IP 67</div></div>

Product	
Real power (W)	12W
Real luminous flux (Lm)	613
Beam angle (°)	Asymmetric 27°
Life time (h)	50000h L80B10
IP	IP67
Control gear	On-Off
Power Factor	On-Off
Colour temperature (K)	3000K
Colour consistency (SDCM)	<5SDCM
CRI	80
IK	09