




ING-ASSY

| | | | | | | |
|--------------|---|--|--|--|--|--|
| Item code | 86.OIN6.3351.07 | | | | | |
| Product type | Outdoor | | | | | |
| Category | Recessed Inground Floor | | | | | |
| Family | ING-ASSY | | | | | |
| Pictograms | <div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>850°</div><div>IK 10</div></div> <div><div>CRI 80</div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div>On Off</div></div> <div><div></div><div>50000h L80B10</div><div>IP 67</div></div> | | | | | |

Dimensions

Product dimensions (mm) ø160x153mm

Scheme

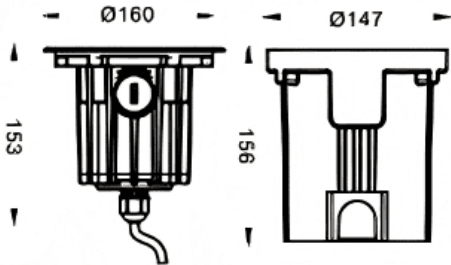

| | |
|----------------------------|--------------------|
| Product | |
| Real power (W) | 13 |
| Real luminous flux (Lm) | 980 |
| Luminous efficiency (Lm/W) | 75.400000000000006 |
| Beam angle (°) | Asymmetric 27° |
| Life time (h) | 50000h L80B10 |
| IP | 67 |
| Control gear | On-Off |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | 5SDCM |
| CRI | 80 |
| IK | IK10 |

Photometry

