




Scheme



Photometry

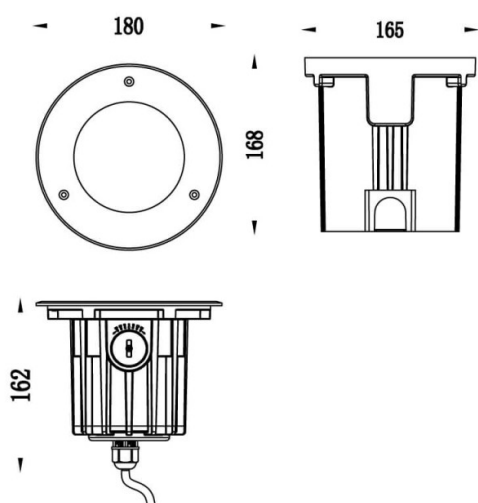

Pictograms

	50 60 Hz	220 240 V	 850°	IK 09
CRI 80	CE	Driver INCL.		SDCM 5
50000h L80B10	IP 67			

Product	
Real power (W)	18W
Real luminous flux (Lm)	937
Beam angle (°)	Asymmetric 27°
Life time (h)	50000h L80B10
IP	IP67
Control gear	On-Off
Power Factor	On-Off
Colour temperature (K)	3000K
Colour consistency (SDCM)	<5SDCM
CRI	80
IK	09