





Scheme

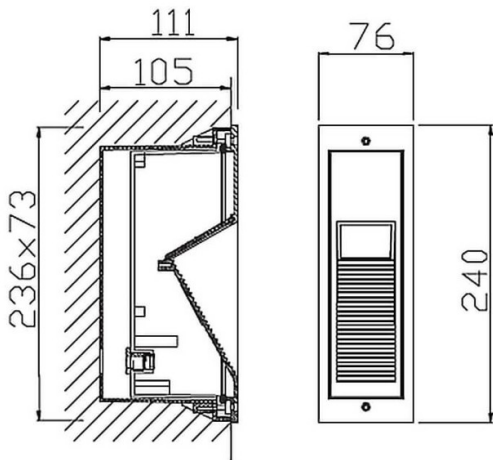

Photometry

RECESSED WALL & CEILING -
WINDOW

Item code 86.ORW1.3351.02

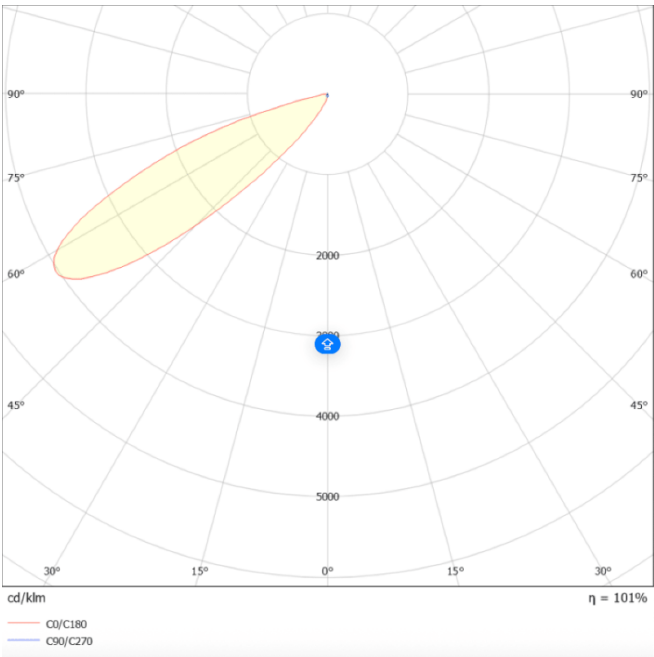

WINDOW

Item code	86.ORW1.3351.02
Product type	Outdoor
Category	Recessed Wall & Ceiling
Family	WINDOW
Pictograms	<div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>IK 10</div></div> <div><div>CRI 80</div><div>SDCM 3</div><div>CE</div><div>Driver INCL</div><div></div></div> <div><div>50000h L70B10</div><div>IP 67</div></div>

Product	
Real power (W)	7,65W
Real luminous flux (Lm)	488,39LM
Luminous efficiency (Lm/W)	63,81
Beam angle (°)	Asymmetric
Life time (h)	50000h L70B10
IP	IP65
Control gear	ON-OFF
Power Factor	>0,11
Colour temperature (K)	3000K
Colour consistency (SDCM)	SDCM<5
CRI	80
IK	IK10