





Scheme

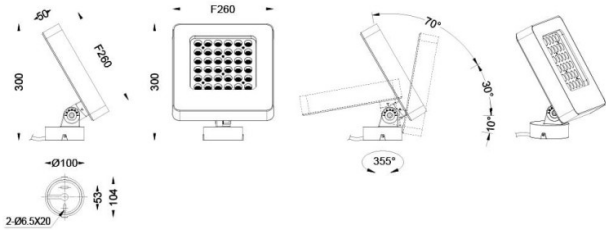

Photometry

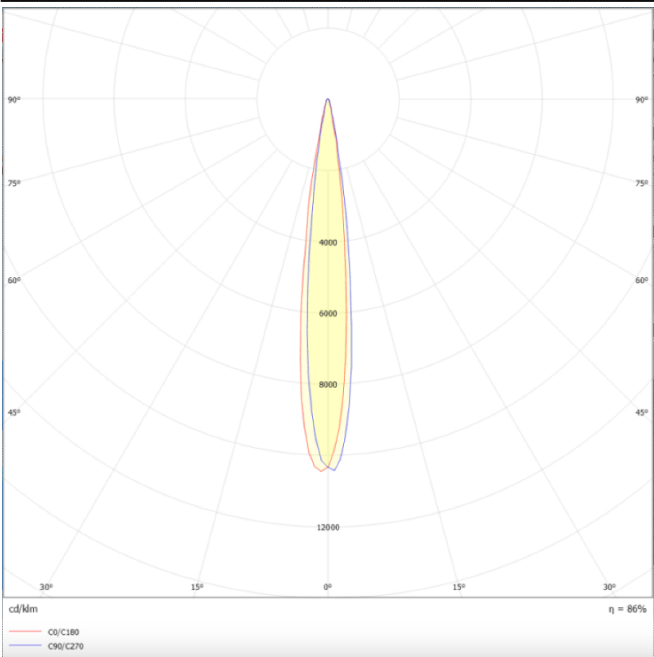

Quadro

Item code	86.OSP4.3321.03
Product type	Outdoor
Category	Spike Spot Light
Family	Quadro
Pictograms	<div><div></div><div>220 240 V</div><div></div><div>850°</div><div>CRI 80</div><div>SDCM 3</div></div> <div><div>CE</div><div>Driver INCL.</div><div>On Off</div><div></div><div></div></div> <div><div>50000h L70B10</div><div>IP 65</div><div></div><div>335° 90°</div><div>IK 05</div></div>

Product	
Real power (W)	54
Real luminous flux (Lm)	3839
Luminous efficiency (Lm/W)	71.092592592592595
Beam angle (°)	25
IP	66
Control gear	ON-OFF
Average life time (h)	50000h L70B10
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK08