


## VILA P60

| | |
|---|---|
| **Item code** | **86.OS06.4321.02** |
| **Product type** | **Outdoor** |
| **Category** | **Street lights** |
| **Family** | **VILA** |
| **Subfamily** | **VILA P60** |
| **Pictograms** |  |



| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **90x90x76x H145mm** |


**Scheme**





| **Product** | |
|---|---|
| **Real power (W)** | **18** |
| **Real luminous flux (Lm)** | **1260** |
| **Luminous efficiency (Lm/W)** | **70** |
| **Beam angle (º)** | **10** |
| **Life time (h)** | **50000h L70B10** |
| **IP** | **65** |
| **Electrical feeding** | **220-240V** |
| **Control gear** | **ON-OFF** |
| **Average life time (h)** | **50000h L70B10** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **7** |

## Photometry

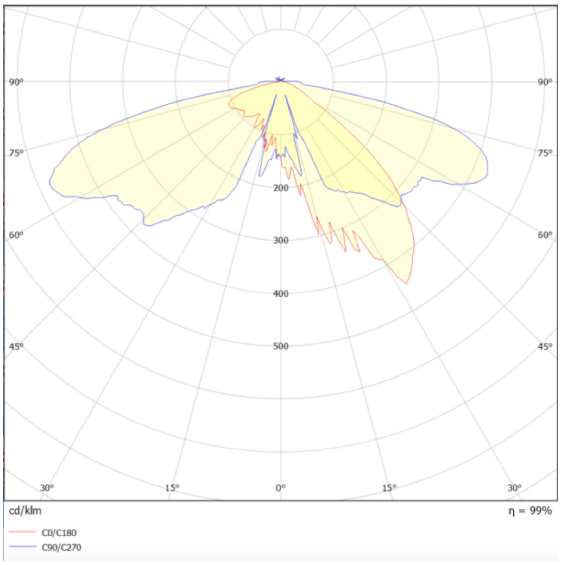
90°
90°
75°
75°
200
60°
60°
300
400
45°
500
45°
30°
15°
0°
15°
30°
cd/klm
η = 99%
C0/C180
C90/C270