








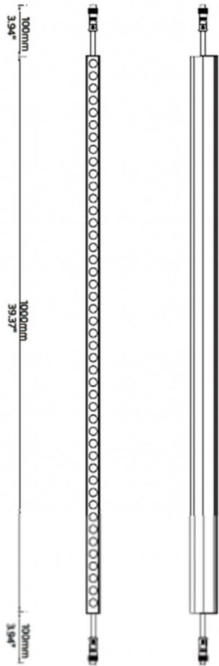




FACADE

| | | | | | |
|--------------|--|--|--|--|--|
| Item code | 86.OW08.1320.03 | | | | |
| Product type | Outdoor | | | | |
| Category | Linear Light | | | | |
| Family | FACADE | | | | |
| Pictograms | <div><div>850°</div><div>CRI 80</div><div>SDCM 3</div><div>CE</div><div>Driver EXCL.</div></div> <div><div>On Off</div><div></div><div></div><div>IP 66</div></div> | | | | |

Scheme



| | |
|---------------------------|---------------|
| Product | |
| Real power (W) | 12 |
| Real luminous flux (Lm) | 179.1 |
| Beam angle (°) | 40 |
| IP | 65 |
| Operating temperature | -35-60o |
| Average life time (h) | 80000h L70B10 |
| Colour temperature (K) | W |
| Colour consistency (SDCM) | SDCM<3 |