

PATH




|              |   |
|--------------|---|
| Item code    | 86.OB10.1311.02   |
| Product type | Outdoor   |
| Category     | Bollards  |
| Family       | PATH  |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div></div><div>IK<br/>10</div></div> <div><div>CRI<br/>80</div><div>SDCM<br/>3</div><div></div><div>Driver<br/>INCL.</div><div></div></div> <div><div>IP<br/>66</div><div>50000h<br/>L70B10</div></div> |

Dimensions

Product dimensions (mm)  $\Phi 135 \times 500 \text{mm}$

Scheme

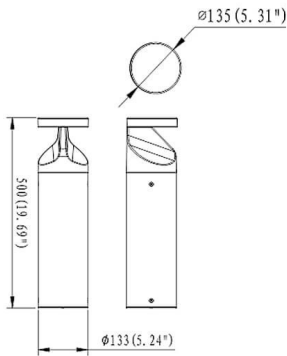

|                            |                   |
|----------------------------|-------------------|
| Product                    |                   |
| Real power (W)             | 15                |
| Real luminous flux (Lm)    | 1500              |
| Luminous efficiency (Lm/W) | 100               |
| Beam angle (°)             | Assymetric type V |
| Life time (h)              | 50000h L70B10     |
| IP                         | 66                |
| Control gear               | ON-OFF            |
| Colour temperature (K)     | 3000              |
| Colour consistency (SDCM)  | SDCM<3            |
| CRI                        | 80                |
| IK                         | IK10              |