

PATH




|              |  |
|--------------|--|
| Item code    | 86.OB10.1312.02  |
| Product type | Outdoor  |
| Category     | Bollards   |
| Family       | PATH   |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div></div><div>850°</div><div>IK<br/>10</div></div> <div><div>CRI<br/>80</div><div>SDCM<br/>3</div><div></div><div>Driver<br/>INCL.</div><div></div></div> <div><div>IP<br/>66</div><div>50000h<br/>L70B10</div></div> |

Dimensions

Product dimensions (mm)  $\Phi 135 \times 500 \text{mm}$

Scheme

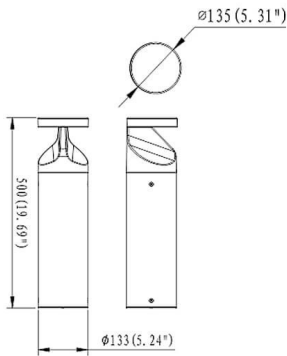

|                            |                            |
|----------------------------|----------------------------|
| Product                    |                            |
| Real power (W)             | 15                         |
| Real luminous flux (Lm)    | 1500                       |
| Luminous efficiency (Lm/W) | 100                        |
| Beam angle (°)             | Assymetric type V          |
| Life time (h)              | 50000h L70B10              |
| IP                         | 66                         |
| Control gear               | ON-OFF+ pressence detector |
| Colour temperature (K)     | 3000                       |
| Colour consistency (SDCM)  | SDCM3                      |
| CRI                        | 80                         |
| IK                         | IK10                       |