



- Installation and wiring of luminaire must be in accordance with all applicable local codes.
- Installation, inspection, and maintenance of luminaires should be performed by a qualified electrician.
- DO NOT make or alter any open holes in the luminaire. Do not modify the luminaire.
- DO NOT install damaged product.
- Make sure electrical power is OFF before and during installation and maintenance.
- Make sure the equipment is properly grounded.
- Make sure the supply voltage is same as the rated fixture voltage.

Instruction Manual



PIR sensor detection coverage

The light keeps 100% when presence is detected for 3 minute hold time, then turn off if no presence detected.



| Product Specifications | | 15W | | 25W | |
|------------------------|--------------|--|--------------------------------|-------------------------------|--------------------------------|
| Input Voltage | | 100-277 Vac/120-277 Vac/100-240 Vac/220-240 Vac (Subject to the input voltage on nameplate) | | | |
| Power Frequency | | 50 / 60 Hz | | | |
| Outlook Dimensions | | Ø135×500mm (Ø5.31"×19.69") | Ø135×1000mm (Ø5.31"×39.37") | Ø135×500mm (Ø5.31"×19.69") | Ø135×1000mm (Ø5.31"×39.37") |
| Net Weight | | 3.8±0.3kg (8.38±0.66Lbs) | 5.4±0.3kg (11.9±0.66Lbs) | 3.8±0.3kg (8.38±0.66Lbs) | 5.4±0.3kg (11.9±0.66Lbs) |
| Working Temperature | Conventional | -20°C to + 45°C(-4°F to +113°F) | | | |
| | With PIR | -20°C to + 40°C(-4°F to +104°F) | | | |
| | DALI | -30°C to + 50°C(-22°F to +122°F) | | | |
| Storing Temperature | | -40°C to + 70°C(-40°F to +158°F) | | | |

Dimmable

| | | | | | | | | | | | |
|-------------|--------------|----|-------------|----|-------------|----|--------|----|-------|----|--------|
| DIM+/DA1 | purple | or | purple | or | blue | or | brown | or | black | or | red |
| DIM-/DA2 | gray | | pink | | white | | blue | | gray | | orange |
| DIM+/DA1 | purple | | purple | | purple | | purple | | | | |
| DIM-/DA2 | gray | | pink | | gray | | pink | | | | |
| Aux 12Vdc + | pink | | black/white | | black/white | | red | | | | |
| DIM+/DA1 | purple | | purple | | purple | | purple | | | | |
| DIM-/DA2 | gray | | pink | | gray | | pink | | | | |
| Aux 12Vdc + | pink | | black/white | | black/white | | red | | | | |
| Aux 12Vdc - | black/white | | blue/white | | orange | | | | | | |
| L | brown | | black | | | | | | | | |
| N | blue | | white | | | | | | | | |
| ⓪ GND | yellow/green | | green | | | | | | | | |



Warning! do not wire dim cord to high voltage, or dim function will fail.


- For type Y attachments:
if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Installation Instructions

| Packing List | | |
|---|---------------------|------|
|  | Base plate template | 1PC |
|  | Screw fixing plate | 1PC |
|  | Screw M5*16 | 4PCS |
|  | Screw M6 | 3PCS |
|  | Nut M6 | 3PCS |



Physical Dimensions(mm/inch)

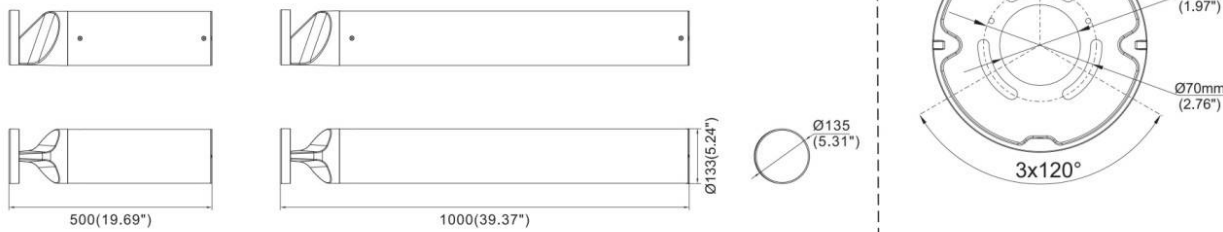

Installation

