





Dimensions

Product dimensions (mm) $\Phi 135 \times 1000 \text{mm}$



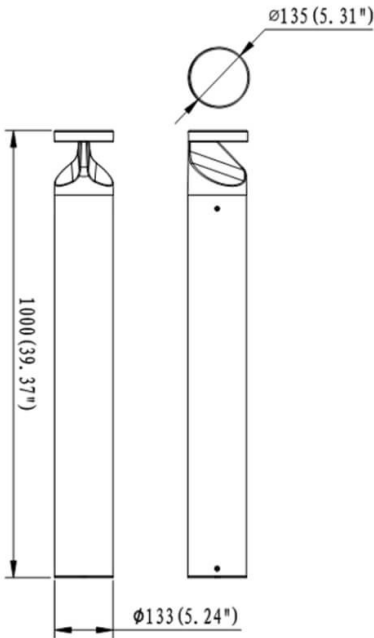

Scheme

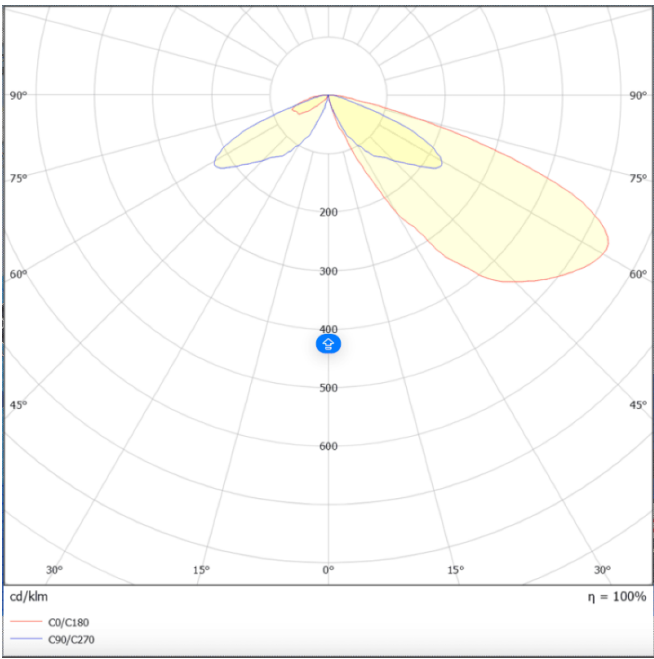

Photometry



PATH

Item code	86.OB10.2312.02
Product type	Outdoor
Category	Bollards
Family	PATH
Pictograms	<div><div></div><div><div>50 60</div><div>Hz</div></div><div><div>220 240</div><div>V</div></div><div></div><div><div>850°</div></div><div><div>IK 10</div></div></div> <div><div><div>CRI 80</div></div><div><div>SDCM 3</div></div><div></div><div><div>Driver INCL.</div></div><div></div></div> <div><div><div>IP 66</div></div><div><div>50000h L70B10</div></div></div>

Product	
Real power (W)	25
Real luminous flux (Lm)	2500
Luminous efficiency (Lm/W)	100
Beam angle (°)	Assymetric type V
Life time (h)	50000h L70B10
IP	66
Control gear	ON-OFF+ pressence detector
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10