




- Installation and wiring of luminaire must be in accordance with all applicable local codes.
- Installation, inspection, and maintenance of luminaires should be performed by a qualified electrician.
- DO NOT make or alter any open holes in the luminaire. Do not modify the luminaire.
- DO NOT install damaged product.
- Make sure electrical power is OFF before and during installation and maintenance.
- Make sure the equipment is properly grounded.
- Make sure the supply voltage is same as the rated fixture voltage.

## Instruction Manual



### PIR sensor detection coverage

The light keeps 100% when presence is detected for 3 minute hold time, then turn off if no presence detected.

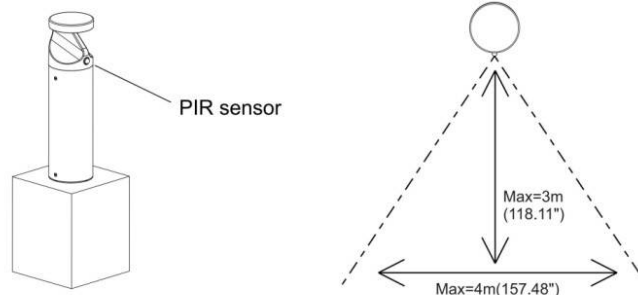

| Product Specifications |              | 15W  |                                | 25W                           |                                |
|------------------------|--------------|--|--------------------------------|-------------------------------|--------------------------------|
| Input Voltage          |              | 100-277 Vac/120-277 Vac/100-240 Vac/220-240 Vac<br>(Subject to the input voltage on nameplate) |                                |                               |                                |
| Power Frequency        |              | 50 / 60 Hz   |                                |                               |                                |
| Outlook Dimensions     |              | Ø135×500mm<br>(Ø5.31"×19.69")  | Ø135×1000mm<br>(Ø5.31"×39.37") | Ø135×500mm<br>(Ø5.31"×19.69") | Ø135×1000mm<br>(Ø5.31"×39.37") |
| Net Weight             |              | 3.8±0.3kg<br>(8.38±0.66Lbs)  | 5.4±0.3kg<br>(11.9±0.66Lbs)    | 3.8±0.3kg<br>(8.38±0.66Lbs)   | 5.4±0.3kg<br>(11.9±0.66Lbs)    |
| Working Temperature    | Conventional | -20°C to +45°C(-4°F to +113°F)   |                                |                               |                                |
|                        | With PIR     | -20°C to +40°C(-4°F to +104°F)   |                                |                               |                                |
|                        | DALI         | -30°C to +50°C(-22°F to +122°F)  |                                |                               |                                |
| Storing Temperature    |              | -40°C to +70°C(-40°F to +158°F)  |                                |                               |                                |

### Dimmable

|   |   |    |                            |    |                            |    |                            |    |                            |    |                            |
|---|---|----|----------------------------|----|----------------------------|----|----------------------------|----|----------------------------|----|----------------------------|
| L brown black<br>N blue white<br>GND yellow/green green | DIM+/DA1 purple<br>DIM-/DA2 gray            | or | purple<br>pink             | or | blue<br>white              | or | brown<br>blue              | or | black<br>gray              | or | red<br>orange              |
|   | DIM+/DA1 purple<br>DIM-/DA2 gray            | or | purple<br>pink             | or | purple<br>gray             | or | purple<br>pink             | or | purple<br>pink             | or | purple<br>pink             |
|   | Aux 12Vdc + pink<br>Aux 12Vdc - black/white | or | black/white<br>black/white | or | black/white<br>black/white | or | black/white<br>black/white | or | black/white<br>black/white | or | black/white<br>black/white |
|   | DIM+/DA1 purple<br>DIM-/DA2 gray            | or | purple<br>pink             | or | purple<br>pink             | or | purple<br>pink             | or | purple<br>pink             | or | purple<br>pink             |
| L brown black<br>N blue white<br>GND yellow/green green | DIM+/DA1 purple<br>DIM-/DA2 gray            | or | purple<br>pink             | or | purple<br>gray             | or | purple<br>pink             | or | purple<br>pink             | or | purple<br>pink             |
|   | Aux 12Vdc + pink<br>Aux 12Vdc - black/white | or | black/white<br>black/white | or | black/white<br>black/white | or | black/white<br>black/white | or | black/white<br>black/white | or | black/white<br>black/white |
|   | DIM+/DA1 purple<br>DIM-/DA2 gray            | or | purple<br>pink             | or | purple<br>pink             | or | purple<br>pink             | or | purple<br>pink             | or | purple<br>pink             |
|   | Aux 12Vdc + pink<br>Aux 12Vdc - black/white | or | black/white<br>black/white | or | black/white<br>black/white | or | black/white<br>black/white | or | black/white<br>black/white | or | black/white<br>black/white |



Warning! do not wire dim cord to high voltage, or dim function will fail.


- For type Y attachments: if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Installation Instructions

| Packing List  |                     |      |
|---|---------------------|------|
|  | Base plate template | 1PC  |
|  | Screw fixing plate  | 1PC  |
|  | Screw M5*16         | 4PCS |
|  | Screw M6            | 3PCS |
|  | Nut M6              | 3PCS |



Physical Dimensions(mm/inch)

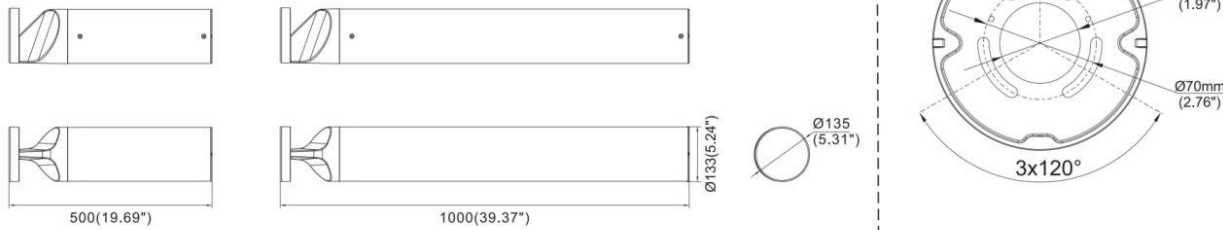

Installation

