




SDOWN

| | | | | | |
|--------------|--|--|--|--|--|
| Item code | 86.OC02.1331.03 | | | | |
| Product type | Outdoor | | | | |
| Category | Surface Ceiling Downlight | | | | |
| Family | SDOWN | | | | |
| Pictograms | <div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>850°</div><div>CRI 80</div></div> <div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>50000h L80B10</div></div> <div><div>IP 65</div><div>IK 06</div></div> | | | | |

Dimensions

Product dimensions (mm) diam 83x131mm

Scheme

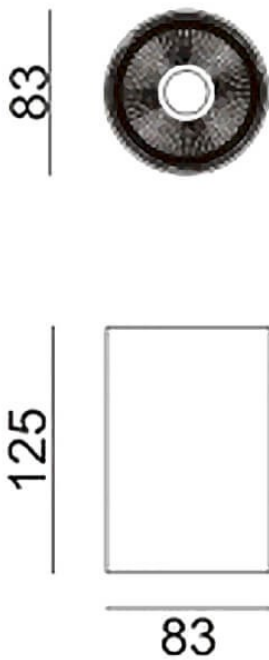

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 15 |
| Real luminous flux (Lm) | 1150 |
| Luminous efficiency (Lm/W) | 76.67 |
| Beam angle (°) | 40° |
| Life time (h) | 50000h L80B10 |
| IP | 65 |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | >80 |
| IK | IK06 |