










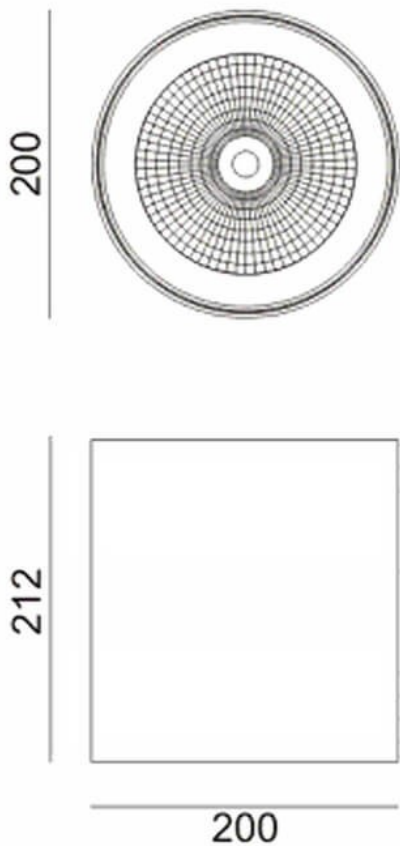




SDOWN

| | | | | | |
|--------------|---|---|---|---|---|
| Item code | 86.OC02.4311.03 | | | | |
| Product type | Outdoor | | | | |
| Category | Surface Ceiling Downlight | | | | |
| Family | SDOWN | | | | |
| Pictograms |  |  |  |  |  |
| |  |  |  |  | |
| |  |  | | | |

Scheme



| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 50 |
| Real luminous flux (Lm) | 4450 |
| Luminous efficiency (Lm/W) | 89 |
| Beam angle (°) | 15° |
| Life time (h) | 50000h L80B10 |
| IP | 65 |
| Chip Brand | Osram |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | >80 |
| IK | IK06 |