















SDOWN


| | |
|--------------|---------------------------|
| Item code | 86.OC02.4333.01 |
| Product type | Outdoor |
| Category | Surface Ceiling Downlight |
| Family | SDOWN |

| | | | | | |
|------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Pictograms |  |  |  |  |  |
| |  |  |  |  |  |
| |  |  | | | |

Dimensions

| | |
|-------------------------|----------------|
| Product dimensions (mm) | diam 200x212mm |
|-------------------------|----------------|

Scheme

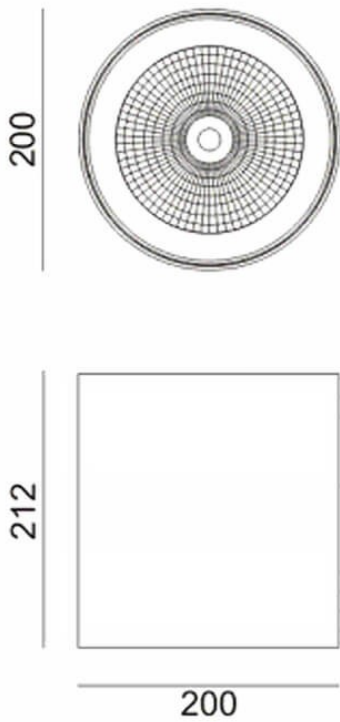

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 50 |
| Real luminous flux (Lm) | 4450 |
| Luminous efficiency (Lm/W) | 89 |
| Beam angle (°) | 40° |
| Life time (h) | 50000h L80B10 |
| IP | 65 |
| Control gear | DALI |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | >80 |
| IK | IK06 |