





FLYING R

|              |                                                                                                                                                      |  |  |  |  |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| Item code    | 86.A007.6333.02                                                                                                                                      |  |  |  |  |
| Product type | Indoor                                                                                                                                               |  |  |  |  |
| Category     | Architectural luminaires                                                                                                                             |  |  |  |  |
| Family       | FLYING                                                                                                                                               |  |  |  |  |
| Subfamily    | FLYING R                                                                                                                                             |  |  |  |  |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div>CRI<br/>80</div><div>SDCM<br/>3</div><div>CE</div><div>Driver<br/>INCL</div><div>On<br/>Off</div></div> |  |  |  |  |

Dimensions

Product dimensions (mm)      diam 875x91 mm

Scheme

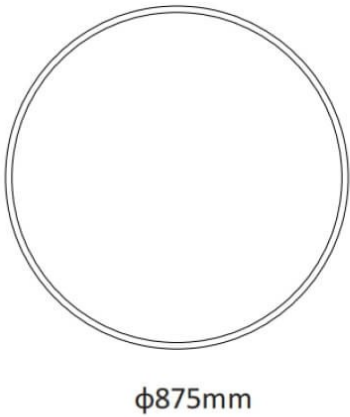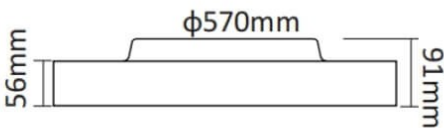

|                            |                    |
|----------------------------|--------------------|
| Product                    |                    |
| Real power (W)             | 100                |
| Real luminous flux (Lm)    | 10000              |
| Luminous efficiency (Lm/W) | 100                |
| Beam angle (°)             | 90                 |
| Chip Brand                 | Samsung            |
| Control gear               | DALI               |
| Power Factor               | >0,96              |
| Average life time (h)      | L80 B20, 50,000hrs |
| Colour temperature (K)     | 3000K              |
| Colour consistency (SDCM)  | SDCM4              |
| CRI                        | 80                 |