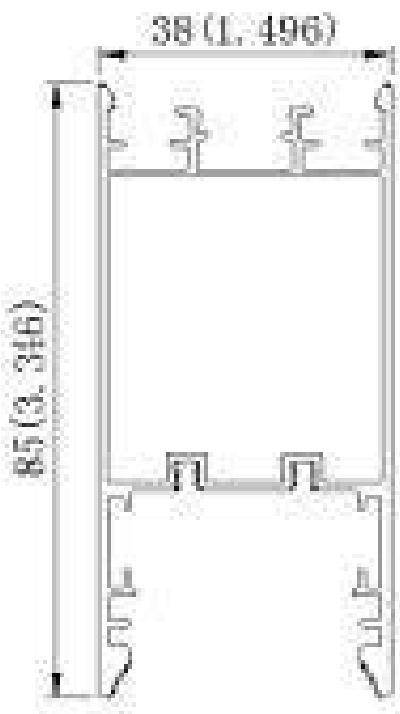


Dimensions**Product dimensions (mm)****L1206xH85xW38****Scheme****SLINE**

Lavov linear system from the family SLINE with a power of 20W and an optics 110 degrees beam angle. CCT 4000. CRI 80. PC Diffuser. UGR22. With a total lumen output of 1519lm and an efficacy of 75,95lm/W . Made in Extruded Aluminium and finished in White color. ON-OFF driver 110-2777V.

Item code	85.L001.1401.01
Product type	Indoor
Category	Linear Systems
Family	SLINE
Pictograms	
Product	
Real power (W)	20
Real luminous flux (Lm)	1519
Luminous efficiency (Lm/W)	75.95
Beam angle (°)	110
Life time (h)	50000h L80B10
IP	20
Colour	White
U. G. R	22
Control gear included	Yes
Control gear	ON-OFF
Light source	LED
Type of LED	SMD
Average life time (h)	L80 B20, 50,000hrs
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<3
CRI	80

**Product**

Real power (W)	20
Real luminous flux (Lm)	1519
Luminous efficiency (Lm/W)	75.95
Beam angle (°)	110
Life time (h)	50000h L80B10
IP	20
Colour	White
U. G. R	22
Control gear included	Yes
Control gear	ON-OFF
Light source	LED
Type of LED	SMD
Average life time (h)	L80 B20, 50,000hrs
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<3
CRI	80