


E-DOWNLIGHT



|              |  |
|--------------|--|
| Item code    | 86.E006.1571.01  |
| Product type | Emergency  |
| Category     | Emergency downlight  |
| Family       | E-DOWNLIGHT  |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div>CE</div><div>Driver<br/>INCL.</div></div> <div><div>On<br/>Off</div><div>IP<br/>20</div></div> |

Scheme

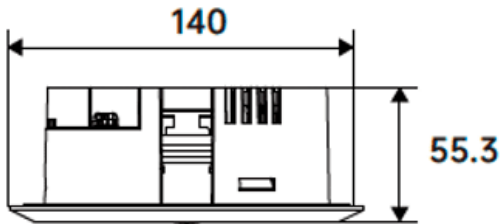

|                             |        |
|-----------------------------|--------|
| Product                     |        |
| Real power (W)              | 3      |
| Real luminous flux (Lm)     | 240    |
| Beam angle (°)              | 165x68 |
| IP                          | 20     |
| Control gear                | ON-OFF |
| Colour temperature (K)      | 5000   |
| CRI                         | >70    |
| Emergency battery life time | 3      |

Photometry

