


## OFFICE

Lavov architectural luminaire from the family OFFICE with a power of 70.0 (50,0↑ / 20,0↓)W and a beam angle of ↑ 112°↓ 75° . UGR10. Finished in grey colour. With a total lumen output of 7300lm↑ / 2500lm↓lm and a luminous efficacy of 140lm/W. Made in Aluminium housing and pole, steel foot and micro reflector optics. Driver 1-10V. Motion sensor and daylight sensor included.. CCT 3000K.

| | |
|---|---|
| **Item code** | **86.A0010.1392.03** |
| **Product type** | **Indoor** |
| **Category** | **Architectural luminaires** |
| **Family** | **WORKSTATION** |
| **Subfamily** | **OFFICE** |
| **Pictograms** | |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **1225*65*1968mm** |

**Scheme**

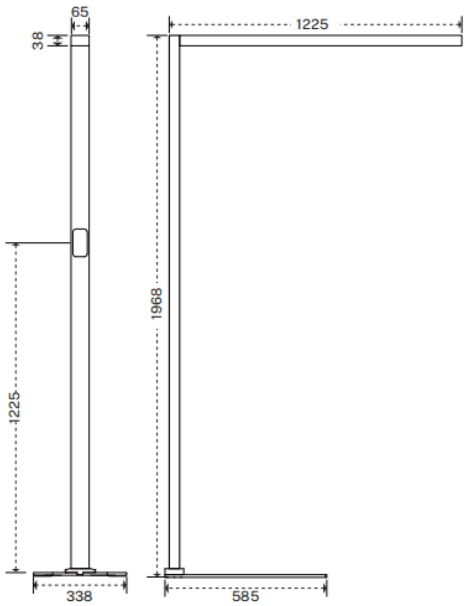


| **Product** | |
|---|---|
| **Real power (W)** | **70.0 (50,0↑ / 20,0↓)** |
| **Real luminous flux (Lm)** | **7300lm↑ / 2500lm↓** |
| **Luminous efficiency (Lm/W)** | **140** |
| **Beam angle (º)** | **↑ 112°↓ 75°** |
| **Colour** | **grey** |
| **U. G. R** | **10** |
| **Control gear included** | **yes** |
| **Control gear** | **1-10V. Motion sensor and daylight sensor included.** |
| **Power Factor** | **>0.9** |
| **Flicker Free** | **yes** |
| **Light source** | **LED** |
| **Type of LED** | **SMD** |
| **Average life time (h)** | **L80 B20, 50,000hrs** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |