



---


#### Scheme

---



---

#### Photometry

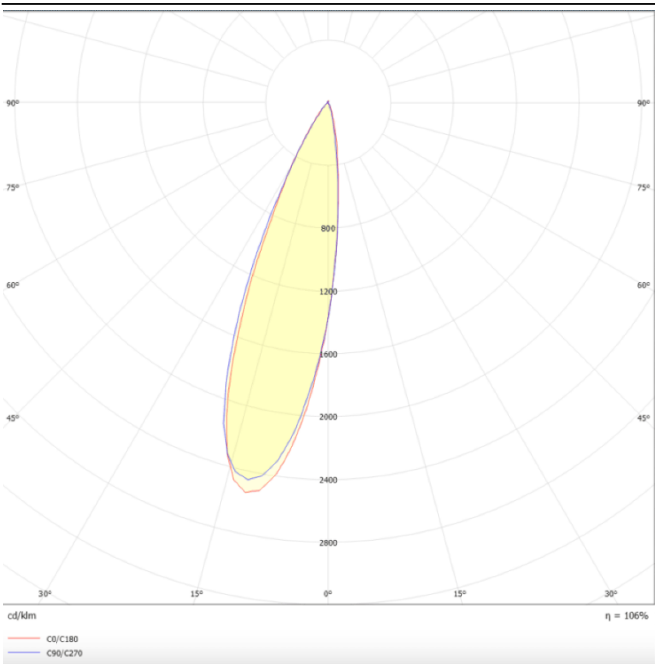

PRO-DS

Lavov downlight from the family PRO-DS with a power of 12,2W and an optics 36 degrees . CCT 3000K. With a total lumen output of 787,5lm and a luminous efficiency of 64,56lm/W.DALI driver. Made in die cast aluminum and finished in Silver color.

|              |   |
|--------------|---|
| Item code    | 86.D026.1333.03   |
| Product type | Indoor  |
| Category     | Downlights  |
| Family       | PRO-D   |
| Subfamily    | PRO-DS  |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div></div><div>CRI<br/>90</div><div>CE</div><div>Driver<br/>INCL</div><div>On<br/>Off</div><div></div><div>IP<br/>20</div><div>50000h<br/>L80B10</div></div> |

|                             |                |
|-----------------------------|----------------|
| Product                     |                |
| Real power (W)              | 12.2           |
| Real luminous flux (Lm)     | 787.5          |
| Luminous efficiency (Lm/W)  | 64.56          |
| Beam angle (°)              | 36             |
| Life time (h)               | 50000 h L80B10 |
| IP                          | 20             |
| Electrical class insulation | Clas II        |
| Colour                      | Silver         |
| Control gear included       | Yes            |
| Control gear                | DALI           |
| Flicker Free                | Yes            |
| Light source                | LED            |
| Type of LED                 | COB            |
| Colour temperature (K)      | 3000           |
| Colour consistency (SDCM)   | SDCM<3         |
| CRI                         | 90             |