





Scheme



Photometry



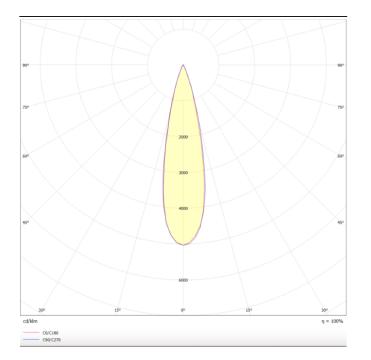

PRO-DS

Lavov downlight from the family PRO-DS with a power of 17,73W and an optics 24 degrees . CCT 3000K. With a total lumen output of 1556lm and a luminous efficiency of 87,76lm/W.DALI driver. Made in die cast aluminum and finished in Silver color.

| Item code | 86.D026.2323.03 Indoor Downlights | |
|--------------|--|--|
| Product type | | |
| Category | | |
| Family | PRO-D | |
| Subfamily | PRO-DS | |
| Pictograms | □ 220 240 v → CRI 50 CE | |
| | Driver On IP 50000h INCL. Off 20 L80B10 | |

| Product | |
|-----------------------------|----------------|
| Real power (W) | 17.73 |
| Real luminous flux (Lm) | 1556 |
| Luminous efficiency (Lm/W) | 87.76 |
| Beam angle (º) | 24 |
| Life time (h) | 50000 h L80B10 |
| IP | 20 |
| Electrical class insulation | Clas II |
| Colour | Silver |
| Control gear included | Yes |
| Control gear | DALI |
| Flicker Free | Yes |
| Light source | LED |
| Type of LED | СОВ |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 90 |

