





Scheme

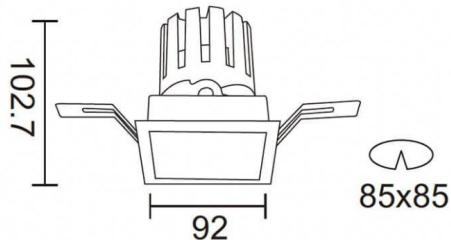

Photometry

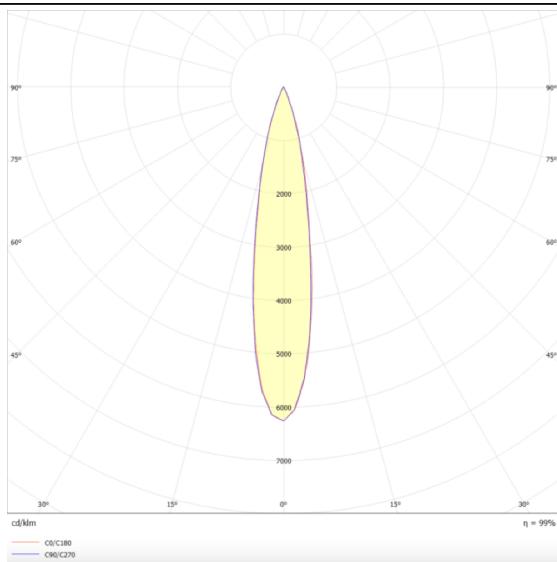

PRO-DS

Lavov downlight from the family PRO-DS with a power of 17,73W and an optics 12 degrees . CCT 4000K. With a total lumen output of 1556lm and a luminous efficiency of 87,76lm/W.DALI driver.

Made in die cast aluminum and finished in White color.

| | |
|--------------|-----------------|
| Item code | 86.D026.2413.01 |
| Product type | Indoor |
| Category | Downlights |
| Family | PRO-D |
| Subfamily | PRO-DS |

| | | | | | |
|------------|---|---|---|---|---|
| Pictograms |  |  |  |  |  |
| |  |  |  |  |  |

Product

| | |
|-----------------------------|----------------|
| Real power (W) | 17.73 |
| Real luminous flux (Lm) | 1556 |
| Luminous efficiency (Lm/W) | 87.76 |
| Beam angle (°) | 12 |
| Life time (h) | 50000 h L80B10 |
| IP | 20 |
| Electrical class insulation | Clas II |
| Colour | White |
| Control gear included | Yes |
| Control gear | DALI |
| Flicker Free | Yes |
| Light source | LED |
| Type of LED | COB |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 90 |