





## Scheme



Photometry



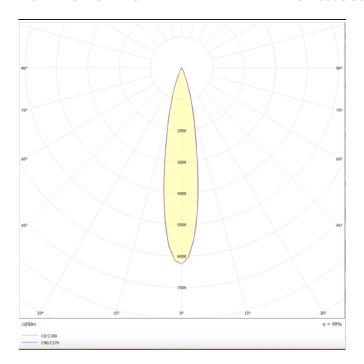

## **PRO-DS**

Lavov downlight from the family PRO-DS with a power of 17,73Wand an optics 12 degrees . CCT 4000K. With a total lumen output  $\,$ of 1556lm and a luminous efficiency of 87,76lm/W.DALI driver. Made in die cast aluminum and finished in Silver color.

| Item code    | 86.D026.2413.03 Indoor Downlights  |  |
|--------------|------------------------------------|--|
| Product type |                                    |  |
| Category     |                                    |  |
| Family       | PRO-D                              |  |
| Subfamily    | PRO-DS                             |  |
| Pictograms   | □ 220 v                            |  |
|              | Driver   On   IP   50000h   L80B10 |  |

| Product                     |                |
|-----------------------------|----------------|
| Real power (W)              | 17.73          |
| Real luminous flux (Lm)     | 1556           |
| Luminous efficiency (Lm/W)  | 87.76          |
| Beam angle (º)              | 12             |
| Life time (h)               | 50000 h L80B10 |
| IP                          | 20             |
| Electrical class insulation | Clas II        |
| Colour                      | Silver         |
| Control gear included       | Yes            |
| Control gear                | DALI           |
| Flicker Free                | Yes            |
| Light source                | LED            |
| Type of LED                 | СОВ            |
| Colour temperature (K)      | 4000           |
| Colour consistency (SDCM)   | SDCM<3         |
| CRI                         | 90             |