





Scheme

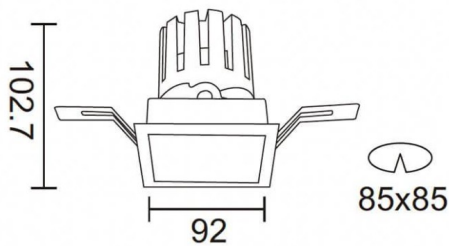

Photometry

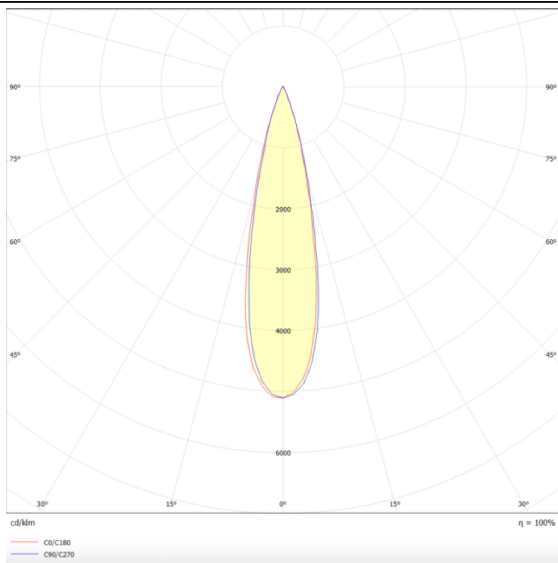

PRO-DS

Lavov downlight from the family PRO-DS with a power of 17,73W and an optics 24 degrees . CCT 4000K. With a total lumen output of 1556lm and a luminous efficiency of 87,76lm/W.DALI driver.

Made in die cast aluminum and finished in Black color.

| | |
|--------------|---|
| Item code | 86.D026.2423.02 |
| Product type | Indoor |
| Category | Downlights |
| Family | PRO-D |
| Subfamily | PRO-DS |
| Pictograms | <div><div></div><div>220 240 V</div><div></div><div>CRI 90</div><div>CE</div><div>Driver INCL</div><div>On Off</div><div>DALI</div><div>IP 20</div><div>50000h L80B10</div></div> |

| | |
|-----------------------------|----------------|
| Product | |
| Real power (W) | 17.73 |
| Real luminous flux (Lm) | 1556 |
| Luminous efficiency (Lm/W) | 87.76 |
| Beam angle (°) | 24 |
| Life time (h) | 50000 h L80B10 |
| IP | 20 |
| Electrical class insulation | Clas II |
| Colour | Black |
| Control gear included | Yes |
| Control gear | DALI |
| Flicker Free | Yes |
| Light source | LED |
| Type of LED | COB |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 90 |