




Scheme



Photometry

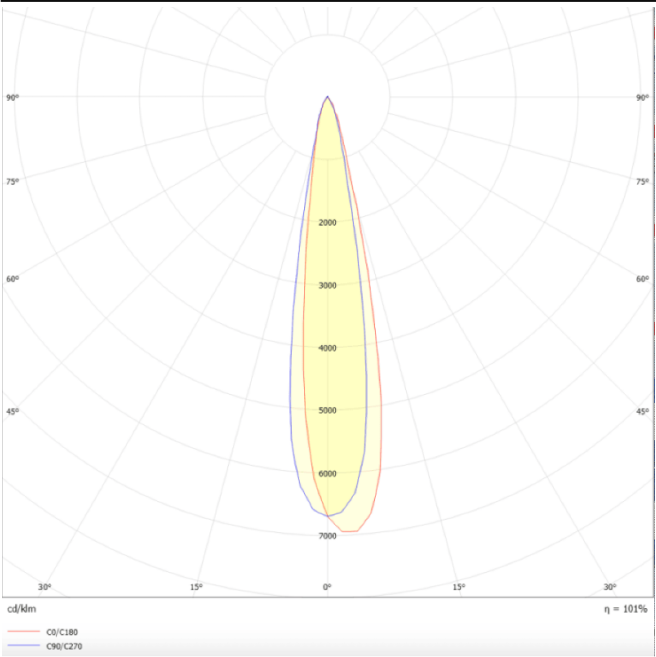

PRO-DS

Lavov downlight from the family PRO-DS with a power of 28,7W and an optics 12 degrees . CCT 3000K. With a total lumen output of 2336lm and a luminous efficiency of 81,4lm/W.DALI driver.

Made in die cast aluminum and finished in Silver color.

Item code	86.D026.3313.03
Product type	Indoor
Category	Downlights
Family	PRO-D
Subfamily	PRO-DS
Pictograms	<div><div></div><div>220 240 V</div><div></div><div>CRI 90</div><div>CE</div><div>Driver INCL</div><div>On Off</div><div>DALI</div><div>IP 20</div><div>50000h L80B10</div></div>

Product	
Real power (W)	28.7
Real luminous flux (Lm)	2336
Luminous efficiency (Lm/W)	81.40000000000006
Beam angle (°)	12
Life time (h)	50000 h L80B10
IP	20
Electrical class insulation	Clas II
Colour	Silver
Control gear included	Yes
Control gear	DALI
Flicker Free	Yes
Light source	LED
Type of LED	COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	90