





### Scheme

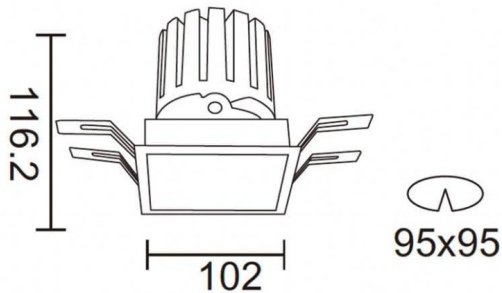

### Photometry

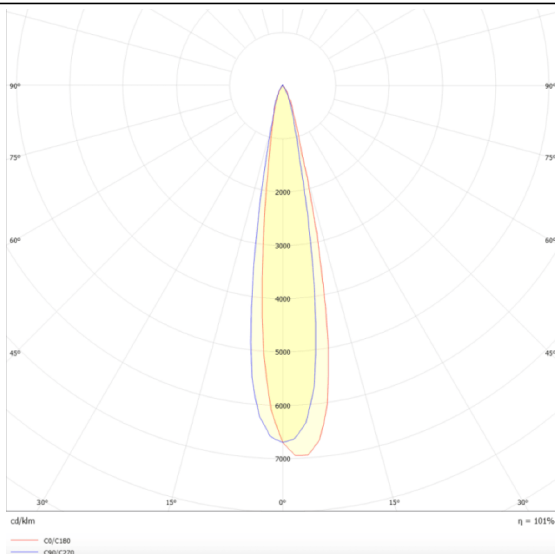

### PRO-DS

Lavov downlight from the family PRO-DS with a power of 28,7W and an optics 12 degrees . CCT 3000K. With a total lumen output of 2336lm and a luminous efficiency of 81,4lm/W.DALI driver. Made in die cast aluminum and finished in Silver color.

|              |                 |
|--------------|-----------------|
| Item code    | 86.D026.3313.03 |
| Product type | Indoor          |
| Category     | Downlights      |
| Family       | PRO-D           |
| Subfamily    | PRO-DS          |
| Pictograms   |                 |

### Product

|                             |                   |
|-----------------------------|-------------------|
| Real power (W)              | 28.7              |
| Real luminous flux (Lm)     | 2336              |
| Luminous efficiency (Lm/W)  | 81.40000000000006 |
| Beam angle (°)              | 12                |
| Life time (h)               | 50000 h L80B10    |
| IP                          | 20                |
| Electrical class insulation | Clas II           |
| Colour                      | Silver            |
| Control gear included       | Yes               |
| Control gear                | DALI              |
| Flicker Free                | Yes               |
| Light source                | LED               |
| Type of LED                 | COB               |
| Colour temperature (K)      | 3000              |
| Colour consistency (SDCM)   | SDCM3             |
| CRI                         | 90                |