





Scheme



Photometry



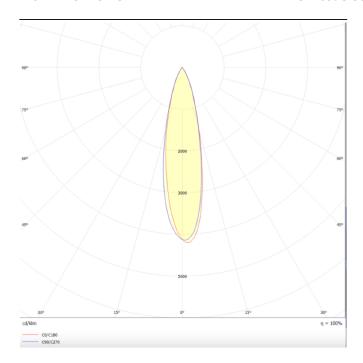

Star

Lavov downlight from the family STAR with a power of 2W and an optics 15 degrees . CCT 3000K. With a total lumen output of 140lm and a luminous efficiency of 70lm/W.DALI driver. Made in die cast aluminum and finished in White color. UGR19.

| Item code | 86.D029.1313.01 | |
|--------------|----------------------------|--|
| Product type | Indoor | |
| Category | Downlights | |
| Family | STAR | |
| Subfamily | Star | |
| Pictograms | 220 v CRI C € Driver INCL. | |
| | On IP 50000h L80B10 | |

| Product | |
|-----------------------------|----------------|
| Real power (W) | 2 |
| Real luminous flux (Lm) | 140 |
| Luminous efficiency (Lm/W) | 70 |
| Beam angle (º) | 15 |
| Life time (h) | 50000 h L80B10 |
| IP | 20 |
| Electrical class insulation | Clas II |
| Colour | White |
| U. G. R | UGR<19 |
| Control gear included | Yes |
| Control gear | DALI |
| Flicker Free | Yes |
| Light source | LED |
| Type of LED | СОВ |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 90 |