



Dimensions

Product dimensions (mm)

L403*W33*H60

010180D15

Scheme


| | | • |
|---------|----|------|
| | 60 | |
| | | |
| 402 | | 34.5 |

DDDDDDDDDDDDDDD

Photometry

SURFACE DOWNLIGHTS - STAR-S



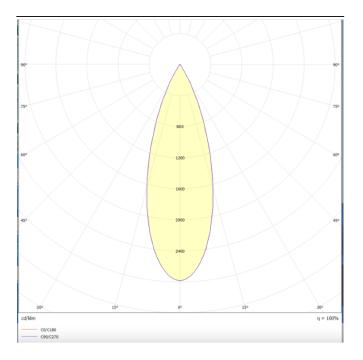

STAR-S

Lavov surface downlight from the family STAR-S with a power of 30W and an optics of 30 degrees made in Die Cast Aluminum and Micro reflectors PC and louvers ABSwith a real lumen output of 2250Im and an efficiency of 75Im/W, ON-OFF driver.

| Item code | 86.D032.3321.02 | | |
|--------------|-------------------------------|--|--|
| Product type | | | |
| Category | Surface Downlights | | |
| Family | STAR-S | | |
| Pictograms | 220 v 240 v 850° CRI CE | | |
| | On IP 50000h Off 20 L80B10 | | |

| Product | |
|----------------------------|---------------|
| Real power (W) | 30 |
| Real luminous flux (Lm) | 2340 |
| Luminous efficiency (Lm/W) | 78 |
| Beam angle (º) | 24 |
| Life time (h) | 50000h L80B10 |
| IP | 20 |
| Colour | Black |
| U. G. R | <19 |
| Control gear included | Yes |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 90 |

