

## Kepler


Lavov downlight from the family Kepler with a power of 12W and a beam angle of 50º. Finished in white colour. With a total lumen output of 726lm and a luminous efficacy of 60.5lm/W. Made in die cast aluminium and PC lenses. Driver Triac dimmable. CCT 3000K.

| | |
|---|---|
| **Item code** | **86.D098.134T.01** |
| **Product type** | **Indoor** |
| **Category** | **Downlights** |
| **Family** | **Kepler** |
| **Subfamily** | **Kepler** |
| **Pictograms** | |

| | |
|---|---|
| **Product** | |
| **Real power (W)** | **12** |
| **Real luminous flux (Lm)** | **726** |
| **Luminous efficiency (Lm/W)** | **60.5** |
| **Beam angle (º)** | **50º** |
| **Life time (h)** | **50000hrs L80B10** |
| **IP** | **IP44** |
| **Colour** | **white** |
| **Control gear included** | **yes** |
| **Control gear** | **Triac dimmable** |
| **Flicker Free** | **yes** |
| **Light source** | **led** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **90** |
| **IK** | **06** |

| | |
|---|---|
| **Dimensions** | |
| **Product dimensions (mm)** | **ø62*H59mm** |

## Scheme

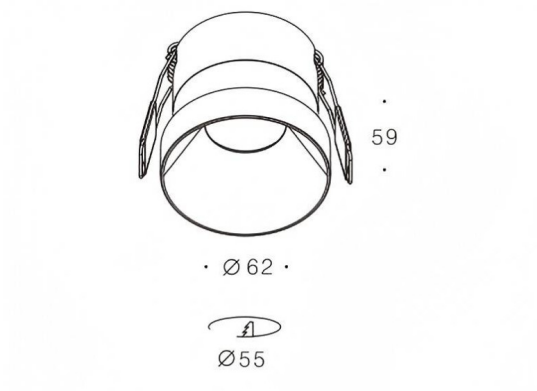


## Photometry

