




HEF Low glare

Lavov downlight from the family with a power of 5W and a beam angle of 55°. Finished in white and white reflector colour. With a total lumen output of 600lm and a luminous efficacy of 120lm/W. Made in die cast aluminium housing and micro nano PC lenses. Driver DALI dimmable. CCT 4000K.

Dimensions

Product dimensions (mm) **ø110*H50mm**

Scheme

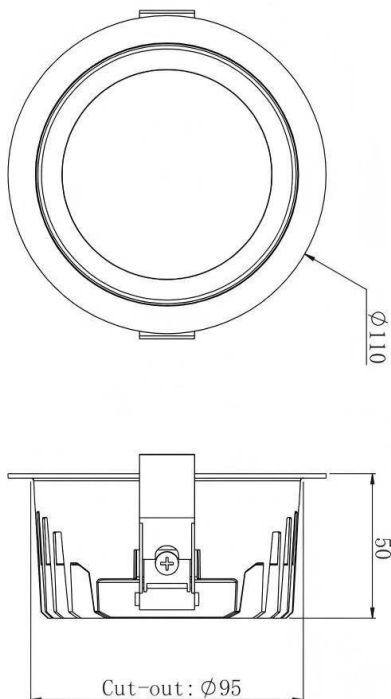

| | |
|--------------|-----------------|
| Item code | 86.D100.1433.01 |
| Product type | Indoor |
| Category | Downlights |
| Family | HEF Low glare |
| Pictograms | |

| | |
|----------------------------|---------------------------|
| Product | |
| Real power (W) | 5 |
| Real luminous flux (Lm) | 600 |
| Luminous efficiency (Lm/W) | 120 |
| Beam angle (°) | 55° |
| Life time (h) | 50000hrs L80B10 |
| IP | IP40 |
| Colour | white and white reflector |
| U. G. R | 19 |
| Control gear included | yes |
| Control gear | DALI dimmable |
| Flicker Free | yes |
| Light source | led |
| Type of LED | SMD |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM5 |
| CRI | 80 |
| IK | 06 |