



### HEF Low glare

Lavov downlight from the family with a power of 35W and a beam angle of 55°. Finished in white and bright silver reflector colour. With a total lumen output of 5250lm and a luminous efficacy of 150lm/W. Made in die cast aluminium housing and micro nano PC lenses. Driver DALI dimmable. CCT 3000K.

|                     |                        |
|---------------------|------------------------|
| <b>Item code</b>    | <b>86.D101.5333.01</b> |
| <b>Product type</b> | <b>Indoor</b>          |
| <b>Category</b>     | <b>Downlights</b>      |
| <b>Family</b>       | <b>HEF Low glare</b>   |


### Pictograms

|                                   |  |
|-----------------------------------|--|
| <b>Product</b>                    |  |
| <b>Real power (W)</b>             | <b>35</b>                                |
| <b>Real luminous flux (Lm)</b>    | <b>5250</b>                              |
| <b>Luminous efficiency (Lm/W)</b> | <b>150</b>                               |
| <b>Beam angle (°)</b>             | <b>55°</b>                               |
| <b>Life time (h)</b>              | <b>50000hrs L80B10</b>                   |
| <b>IP</b>                         | <b>IP40</b>                              |
| <b>Colour</b>                     | <b>white and bright silver reflector</b> |
| <b>U. G. R</b>                    | <b>23</b>                                |
| <b>Control gear included</b>      | <b>yes</b>                               |
| <b>Control gear</b>               | <b>DALI dimmable</b>                     |
| <b>Flicker Free</b>               | <b>yes</b>                               |
| <b>Light source</b>               | <b>led</b>                               |
| <b>Type of LED</b>                | <b>SMD</b>                               |
| <b>Colour temperature (K)</b>     | <b>3000</b>                              |
| <b>Colour consistency (SDCM)</b>  | <b>SDCM5</b>                             |
| <b>CRI</b>                        | <b>80</b>                                |
| <b>IK</b>                         | <b>06</b>                                |

### Dimensions

**Product dimensions (mm)**      **ø220\*H66.5mm**

### Scheme

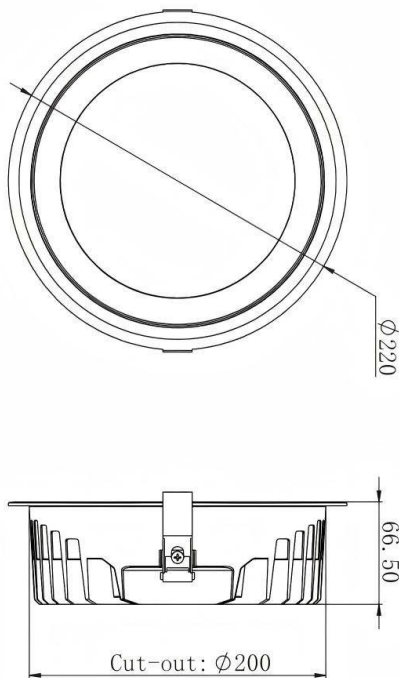

### Photometry

