




NEW PERFORM-RA Smart


Lavov downlight from the family PERFORM-RA with a power of 60W and a beam angle of 80°. Finished in White trim and black reflector. Dimensions $\varnothing 220 \times H131$ mm. With a total lumen output of 6000lm and a luminous efficacy of 100lm/W. Made in Die Cast Aluminum. Driver DALI. CCT 4000K. UGR19.

Dimensions

Product dimensions (mm) $\varnothing 220 \times H131$ mm

Scheme

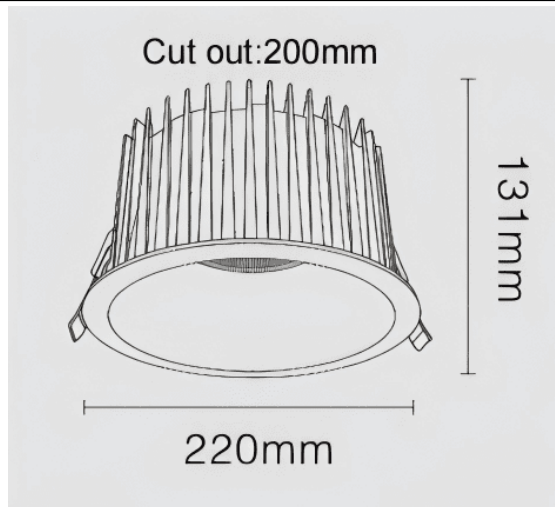
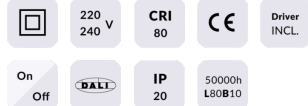
| | |
|--------------|---|
| Item code | 86.D122.5449.B1 |
| Product type | Indoor |
| Category | Downlights |
| Family | NEW PERFORM |
| Subfamily | NEW PERFORM-RA Smart |
| Pictograms |  |

| | |
|-----------------------------|--------------------------------|
| Product | |
| Real power (W) | 60 |
| Real luminous flux (Lm) | 6000 |
| Luminous efficiency (Lm/W) | 100 |
| Beam angle (º) | 80 |
| Life time (h) | 50000 h L80B10 |
| IP | 20 |
| Electrical class insulation | Clas II |
| Colour | White trim and black reflector |
| U. G. R | <19 |
| Control gear included | Yes |
| Control gear | DALI Casambi ready |
| Flicker Free | Yes |
| Light source | LED |
| Type of LED | SMD |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |