



## NEW PERFORM-S Smart

Lavov downlight from the family PERFORM-S with a power of 25W and a beam angle of 36º. Finished in White trim and white reflector. Dimensions ø115*H73mm. With a total lumen output of 2500lm and a luminous efficacy of 100lm/W. Made in Die Cast Aluminum. Driver DALI. CCT 4000K. UGR19.

| | |
|---|---|
| **Item code** | **86.D125.2429.A1** |
| **Product type** | **Indoor** |
| **Category** | **Downlights** |
| **Family** | **NEW PERFORM** |
| **Subfamily** | **NEW PERFORM-S Smart** |
| **Pictograms** |  |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **115*115*H73mm** |

**Scheme**

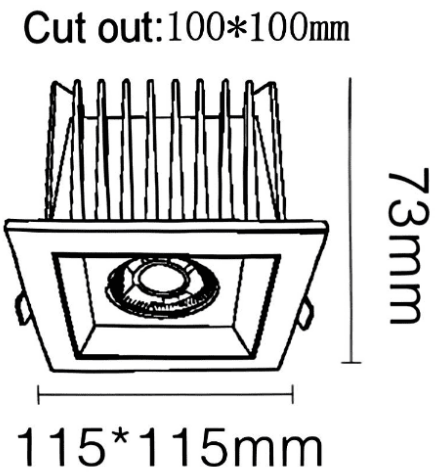


| **Product** | |
|---|---|
| **Real power (W)** | **25** |
| **Real luminous flux (Lm)** | **2500** |
| **Luminous efficiency (Lm/W)** | **100** |
| **Beam angle (º)** | **36** |
| **Life time (h)** | **50000 h L80B10** |
| **IP** | **20** |
| **Electrical class insulation** | **Clas II** |
| **Colour** | **White trim and white reflector** |
| **U. G. R** | **19** |
| **Control gear included** | **Yes** |
| **Control gear** | **DALI Casambi ready** |
| **Flicker Free** | **Yes** |
| **Light source** | **LED** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |