



## NEW PERFORM-SF

Lavov downlight from the family NEW PERFORM-SF with a power of 25W and a beam angle wall washer. Finished in White trim and chromed reflector. Dimensions ø115*115*H73mm. With a total lumen output of 2500lm and a luminous efficacy of 100lm/W. Made in Die Cast Aluminum. Driver DALI. CCT 3000K. UGR19.

| | |
|---|---|
| **Item code** | **86.D127.2353.C1** |
| **Product type** | **Indoor** |
| **Category** | **Downlights** |
| **Family** | **NEW PERFORM** |
| **Subfamily** | **NEW PERFORM-SF** |
| **Pictograms** |  |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **ø115*115*H73mm** |

**Scheme**

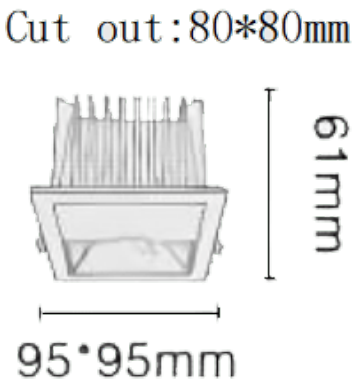


| **Product** | |
|---|---|
| **Real power (W)** | **25** |
| **Real luminous flux (Lm)** | **2500** |
| **Luminous efficiency (Lm/W)** | **100** |
| **Beam angle (º)** | **wall washer** |
| **Life time (h)** | **50000 h L80B10** |
| **IP** | **20** |
| **Electrical class insulation** | **Clas II** |
| **Colour** | **White trim and chromed reflector** |
| **U. G. R** | **19** |
| **Control gear included** | **Yes** |
| **Control gear** | **DALI** |
| **Flicker Free** | **Yes** |
| **Light source** | **LED** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |