




Dimensions

Product dimensions (mm) $\varnothing 110 \times 65$ mm cut size: $\varnothing 100$ mm

Scheme

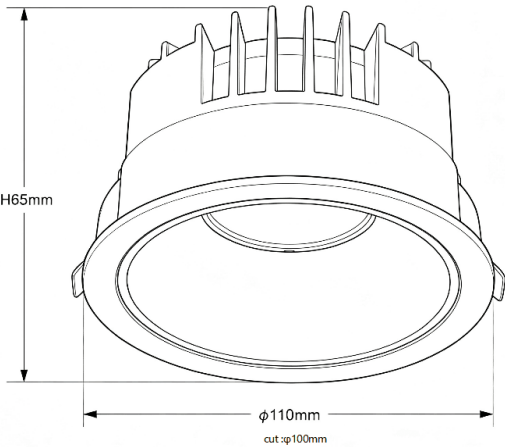

Photometry

Waterproof

Lavov downlight from the family Waterproof eco with a power of 15W and a 25 degrees beam angle. With a total lumen output of 1275lm and a luminous efficiency of 85lm/W. Driver DALI .Made in die cast aluminium . Class II issolation. IP65 . Mains voltage 180-240V . UGR. Finished in White colour. CCT 3000K.CRI90. Dimensions $\varnothing 110 \times 65$ mm cut size: $\varnothing 100$ mm.

Item code	86.D130.1323.01				
Product type	Indoor				
Category	Downlights				
Family	Waterproof				
Subfamily	Waterproof				
Pictograms	220 240 V CRI 80 SDCM 3 CE Driver INCL. On Off 50000h L80B10 IP 65				

Product	
Real power (W)	15
Real luminous flux (Lm)	1275
Luminous efficiency (Lm/W)	85
Beam angle (°)	25
IP	65.0
Electrical class insulation	Class II
Electrical feeding	180-240V
Colour	White
Control gear included	Yes
Control gear	DALI
Flicker Free	Yes
Light source	LED
Type of LED	COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM5
CRI	90

