




### Waterproof

Lavov downlight from the family Waterproof eco with a power of 30W and a 36 degrees beam angle. With a total lumen output of 2550lm and a luminous efficiency of 85lm/W. Driver DALI .Made in die cast aluminium . Class II isolation. IP65 . Mains voltage 180-240V . UGR. Finished in White colour. CCT 3000K.CRI90. Dimensions ø150\*85mm cut size: ø135mm.

### Dimensions

Product dimensions (mm) ø150\*85mm cut size: ø135mm

### Scheme

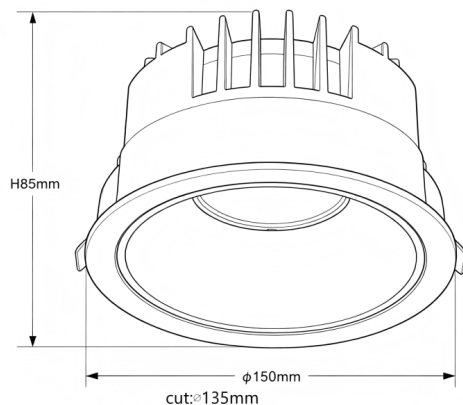

|              |                                                                                                                                                                                                       |  |  |  |  |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| Item code    | 86.D130.2333.01                                                                                                                                                                                       |  |  |  |  |
| Product type | Indoor                                                                                                                                                                                                |  |  |  |  |
| Category     | Downlights                                                                                                                                                                                            |  |  |  |  |
| Family       | Waterproof                                                                                                                                                                                            |  |  |  |  |
| Subfamily    | Waterproof                                                                                                                                                                                            |  |  |  |  |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div>CRI<br/>80</div><div>SDCM<br/>3</div><div>CE</div><div>Driver<br/>INCL.</div><div>On<br/>Off</div><div>50000h<br/>L80B10</div><div>IP<br/>65</div></div> |  |  |  |  |

|                             |          |
|-----------------------------|----------|
| Product                     |          |
| Real power (W)              | 30       |
| Real luminous flux (Lm)     | 2550     |
| Luminous efficiency (Lm/W)  | 85       |
| Beam angle (°)              | 36       |
| IP                          | 65.0     |
| Electrical class insulation | Class II |
| Electrical feeding          | 180-240V |
| Colour                      | White    |
| Control gear included       | Yes      |
| Control gear                | DALI     |
| Flicker Free                | Yes      |
| Light source                | LED      |
| Type of LED                 | COB      |
| Colour temperature (K)      | 3000     |
| Colour consistency (SDCM)   | SDCM5    |
| CRI                         | 90       |