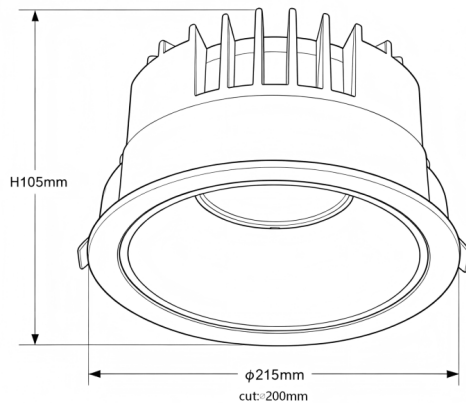


**Dimensions**

|                                |                                    |
|--------------------------------|------------------------------------|
| <b>Product dimensions (mm)</b> | <b>ø215*105mm cut size: ø200mm</b> |
|--------------------------------|------------------------------------|

**Scheme****Waterproof**

Lavov downlight from the family Waterproof eco with a power of 50W and a 55 degrees beam angle. With a total lumen output of 4250lm and a luminous efficiency of 85lm/W. Driver DALI .Made in die cast aluminium . Class II isolation. IP65 . Mains voltage 180-240V . UGR. Finished in White colour. CCT 4000K.CRI90. Dimensions ø215\*105mm cut size: ø200mm.

|                     |                        |
|---------------------|------------------------|
| <b>Item code</b>    | <b>86.D130.3443.01</b> |
| <b>Product type</b> | <b>Indoor</b>          |
| <b>Category</b>     | <b>Downlights</b>      |
| <b>Family</b>       | <b>Waterproof</b>      |
| <b>Subfamily</b>    | <b>Waterproof</b>      |
| <b>Pictograms</b>   |                        |

|                                    |                 |
|------------------------------------|-----------------|
| <b>Product</b>                     |                 |
| <b>Real power (W)</b>              | <b>50</b>       |
| <b>Real luminous flux (Lm)</b>     | <b>4250</b>     |
| <b>Luminous efficiency (Lm/W)</b>  | <b>85</b>       |
| <b>Beam angle (°)</b>              | <b>55</b>       |
| <b>IP</b>                          | <b>65.0</b>     |
| <b>Electrical class insulation</b> | <b>Class II</b> |
| <b>Electrical feeding</b>          | <b>180-240V</b> |
| <b>Colour</b>                      | <b>White</b>    |
| <b>Control gear included</b>       | <b>Yes</b>      |
| <b>Control gear</b>                | <b>DALI</b>     |
| <b>Flicker Free</b>                | <b>Yes</b>      |
| <b>Light source</b>                | <b>LED</b>      |
| <b>Type of LED</b>                 | <b>COB</b>      |
| <b>Colour temperature (K)</b>      | <b>4000</b>     |
| <b>Colour consistency (SDCM)</b>   | <b>SDCM5</b>    |
| <b>CRI</b>                         | <b>90</b>       |