


## PTT R

Lavov downlight from the family PTT R with a power of 7W and a beam angle of 24º. Finished in White colour. Trim version. With a total lumen output of 700lm and a luminous efficacy of 100lm/W. Made in Die Cast Aluminum. Driver DALI. CCT 4000K.

| | |
|---|---|
| **Item code** | **86.D146.1423.01** |
| **Product type** | **Indoor** |
| **Category** | **Downlights** |
| **Family** | **PTT** |
| **Subfamily** | **PTT R** |
| **Pictograms** |  |


| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **ø52xH85mm** |

**Scheme**

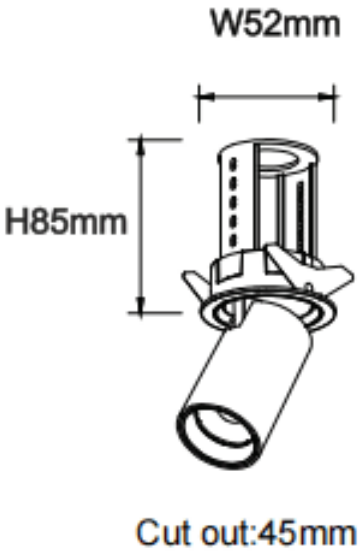


| **Product** | |
|---|---|
| **Real power (W)** | **7** |
| **Real luminous flux (Lm)** | **700** |
| **Luminous efficiency (Lm/W)** | **100** |
| **Beam angle (º)** | **24** |
| **Life time (h)** | **50000 h L80B10** |
| **Colour** | **White** |
| **Control gear included** | **Yes** |
| **Control gear** | **DALI** |
| **Flicker Free** | **Yes** |
| **Light source** | **LED** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **90** |

## Photometry

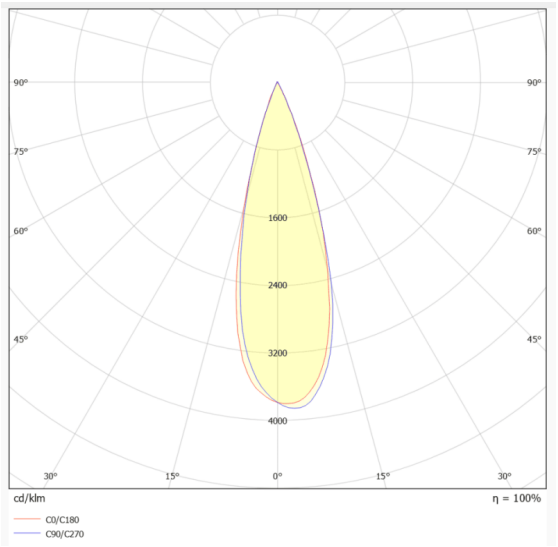
90°
90°
75°
75°
60°
60°
45°
45°
1600
2400
3200
4000
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0/C180
C90/C270