




Scheme

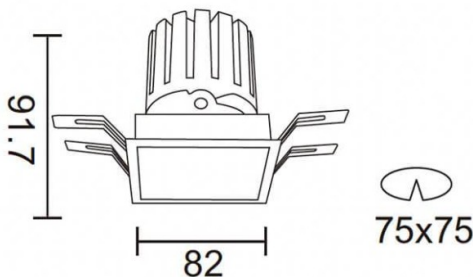

PRO-DS Smart

Lavov downlight from the family PRO-DS Smart with a power of 12,2W and an optics 36 degrees . CCT 3000K. With a total lumen output of 787,5lm and a luminous efficiency of 64,56lm/W.DALI+wireless Casambi driver. Made in die cast aluminum and finished in White color.

Item code	86.DS26.1339.01
Product type	Indoor
Category	Downlights
Family	PRO-D
Subfamily	PRO-DS Smart
Pictograms	<div><div></div><div>220 240 V</div><div></div><div>CRI 90</div><div>CE</div><div>Driver INCL.</div><div>On Off</div><div></div><div>IP 20</div><div>50000h L80B10</div></div>

Product	
Real power (W)	12.2
Real luminous flux (Lm)	787.5
Luminous efficiency (Lm/W)	64.56
Beam angle (°)	36
Life time (h)	50000 h L80B10
IP	20
Electrical class insulation	Clas II
Colour	White
Control gear	DALI+wireless Casambi
Flicker Free	Yes
Light source	LED
Type of LED	COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80