




Scheme

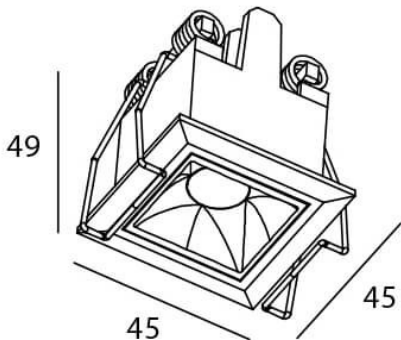

STAR Smart

Lavov downlight from the family STAR with a power of 2W and an optics 30 degrees . CCT 3000K. With a total lumen output of 140lm and a luminous efficiency of 70lm/W.DALI+wireless Casambi driver. Made in die cast aluminum and finished in black color. UGR19.

| | |
|--------------|-----------------|
| Item code | 86.DS29.1329.02 |
| Product type | Indoor |
| Category | Downlights |
| Family | STAR |
| Subfamily | STAR Smart |
| Pictograms | |

| | |
|-----------------------------|-----------------------|
| Product | |
| Real power (W) | 2 |
| Real luminous flux (Lm) | 140 |
| Luminous efficiency (Lm/W) | 70 |
| Beam angle (°) | 30 |
| Life time (h) | 50000 h L80B10 |
| IP | 20 |
| Electrical class insulation | Clas II |
| Colour | black |
| U. G. R | UGR<19 |
| Control gear | DALI+wireless Casambi |
| Flicker Free | Yes |
| Light source | LED |
| Type of LED | SMD |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |