




Scheme

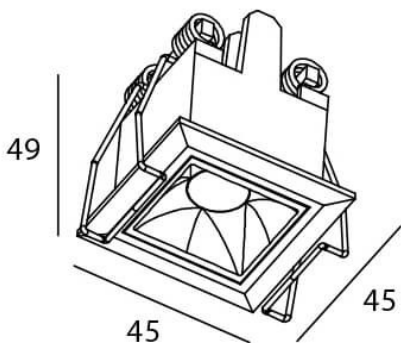

STAR Smart

Lavov downlight from the family STAR with a power of 2W and an optics 45 degrees . CCT 3000K. With a total lumen output of 140lm and a luminous efficiency of 70lm/W.DALI+wireless Casambi driver. Made in die cast aluminum and finished in black color. UGR19.

|              |                 |
|--------------|-----------------|
| Item code    | 86.DS29.1339.02 |
| Product type | Indoor          |
| Category     | Downlights      |
| Family       | STAR            |
| Subfamily    | STAR Smart      |
| Pictograms   |                 |

|                             |                       |
|-----------------------------|-----------------------|
| Product                     |                       |
| Real power (W)              | 2                     |
| Real luminous flux (Lm)     | 140                   |
| Luminous efficiency (Lm/W)  | 70                    |
| Beam angle (°)              | 45                    |
| Life time (h)               | 50000 h L80B10        |
| IP                          | 20                    |
| Electrical class insulation | Clas II               |
| Colour                      | black                 |
| U. G. R                     | UGR<19                |
| Control gear                | DALI+wireless Casambi |
| Flicker Free                | Yes                   |
| Light source                | LED                   |
| Type of LED                 | SMD                   |
| Colour temperature (K)      | 3000                  |
| Colour consistency (SDCM)   | SDCM<3                |
| CRI                         | 80                    |