










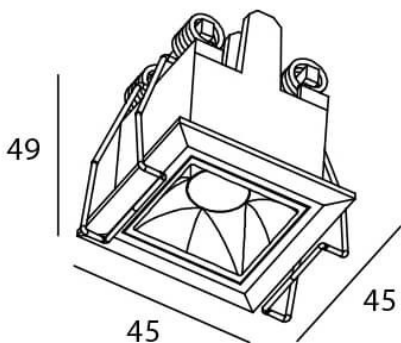


Scheme



STAR Smart

Lavov downlight from the family STAR with a power of 2W and an optics 45 degrees . CCT 4000K. With a total lumen output of 140lm and a luminous efficiency of 70lm/W.DALI+wireless Casambi driver. Made in die cast aluminum and finished in White color. UGR19.

| | |
|--------------|--|
| Item code | 86.DS29.1439.01 |
| Product type | Indoor |
| Category | Downlights |
| Family | STAR |
| Subfamily | STAR Smart |
| Pictograms |          |

| | |
|-----------------------------|-----------------------|
| Product | |
| Real power (W) | 2 |
| Real luminous flux (Lm) | 140 |
| Luminous efficiency (Lm/W) | 70 |
| Beam angle (º) | 45 |
| Life time (h) | 50000 h L80B10 |
| IP | 20 |
| Electrical class insulation | Clas II |
| Colour | White |
| U. G. R | UGR<19 |
| Control gear | DALI+wireless Casambi |
| Flicker Free | Yes |
| Light source | LED |
| Type of LED | SMD |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |